




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H04L 12/28, 29/06</b>	<b>A1</b>	(11) International Publication Number: <b>WO 99/33226</b> (43) International Publication Date: <b>1 July 1999 (01.07.99)</b>
(21) International Application Number: <b>PCT/CA98/01146</b> (22) International Filing Date: <b>18 December 1998 (18.12.98)</b> (30) Priority Data: 2,225,227                      18 December 1997 (18.12.97)    CA (71)(72) Applicants and Inventors: COVELEY, Michael [US/CA]; 6 Fairview Avenue, Richmond Hill, Ontario L4C 6L2 (CA). MILUTINOVIC, Srdjan [YU/CA]; 123 Bartley Bull Parkway, Brampton, Ontario L6W 2J8 (CA). (74) Agents: RUSTON, David, A. et al.; Sim & McBurney, 6th floor, 330 University Avenue, Toronto, Ontario M5G 1R7 (CA).		(81) Designated States: AU, CA, CN, JP, KR, MX, NZ, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the</i> <i>claims and to be republished in the event of the receipt of</i> <i>amendments.</i>

(54) Title: INTELLIGENT COMMUNICATION SERVER AND COMMUNICATION SYSTEM INCORPORATING SAME

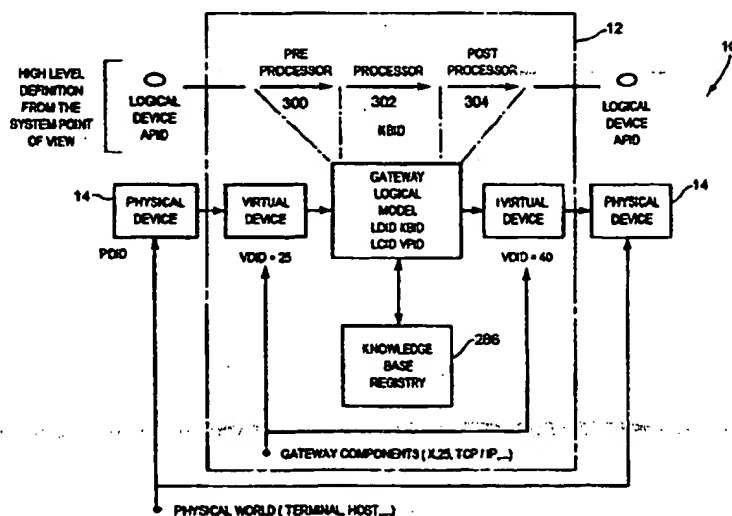

## (57) Abstract

A communication system (10) comprises at least two communication networks (20, 22) over which communications between physical devices (14) connected to the communication networks are to be carried out. The communication networks (20, 22) implement different protocols for messaging. A communication server (12) acts between the communication networks. Messages between the communication networks pass through the communication server. The communication server includes a knowledge base (286) storing protocol conversion information. The communication server (12) accesses the protocol conversion information in the knowledge base (286) upon receipt of a message and converts the protocol thereof to a protocol compatible with the communication network to which the message is being sent.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon	KR	Republic of Korea	PL	Poland		
CN	China	KZ	Kazakhstan	PT	Portugal		
CU	Cuba	LC	Saint Lucia	RO	Romania		
CZ	Czech Republic	LI	Liechtenstein	RU	Russian Federation		
DE	Germany	LK	Sri Lanka	SD	Sudan		
DK	Denmark	LR	Liberia	SE	Sweden		
EE	Estonia			SG	Singapore		

**INTELLIGENT COMMUNICATION SERVER AND  
COMMUNICATION SYSTEM INCORPORATING SAME**

**TECHNICAL FIELD**

The present invention relates to communication systems and in particular to an intelligent communication server to enhance communications connectivity in wireless and/or land-line networks and to a communication system  
5 incorporating the same.

**BACKGROUND ART**

In today's communications environment, users on different networks must communicate with each other. This makes internetworking among various  
10 telecommunications networks an important and challenging technological task. The majority of current interconnected telecommunication networks provide support only for selected applications. It is of course desired that interconnected telecommunication networks support virtually all applications. Difficulties in communications connectivity between applications on wireless networks and host  
15 computers on land-line wired networks has been of concern. Also, the growth of existing services and the introduction of new services on communication networks has significantly increased traffic flow. In heterogeneous wired and wireless networks, communication servers must be able to cope with capacity and network failures while being cost efficient. Accordingly, communication servers which provide flexible  
20 communications connectivity between participants are desired.

It is therefore an object of the present invention to provide a novel communication server to enhance communications connectivity in wireless and/or land-line networks and to provide a novel communication system incorporating the same.  
25

**DISCLOSURE OF THE INVENTION**

According to one aspect of the present invention there is provided a communication system comprising:

at least two communication networks over which communications  
30 between physical devices connected to said communication networks are to be carried, said communication networks implementing different protocols for messaging; and

a communication server acting between said communication networks and through which messages transmitted between said communication networks pass, said communication server including a knowledge base storing protocol conversion information, said communication server accessing said protocol conversion  
5 information in said knowledge base upon receipt of a message and converting the protocol thereof to a protocol compatible with the communication network to which said message is being sent.

Preferably, the communication server includes virtual devices communicating with the communication networks and a virtual gateway bridging the  
10 virtual networks. The virtual gateway accesses the knowledge base and converts protocols of the messages. Preferably, the virtual gateway includes a preprocessor, a processor and a postprocessor. The preprocessor examines each incoming message to locate target logical connection information determining the target destination for the incoming message. The processor converts the protocol of each incoming message,  
15 where appropriate, based on the target logical connection information. The postprocessor wraps each message received from the processor with headers, where appropriate.

In a preferred embodiment, one of the communication networks is a wireless network and another of the communication networks is a wired land-line  
20 network. Messages transmitted over the wireless network include API messages to be processed by destination physical devices and target logical connection information specifying the destinations for the API messages. The target logical connection information is included in a logical message header wrapping the API messages. Preferably, the preprocessor in the virtual gateway strips the logical message header  
25 from the API message upon receipt of a message from a wireless network and uses the logical message header as a key to search the knowledge base for the protocol conversion information. If the preprocessor is unable to obtain the target logical connection information from the logical message header, the preprocessor analyzes the API message of the message received from the wireless network for the target  
30 logical connection information.

According to another aspect of the present invention there is provided a communication server to act as a gateway for the transmission of messages between

two virtual devices communicating with networks implementing different protocols, said communication server comprising:

a knowledge base storing protocol conversion information to convert messages of one protocol to a different protocol; and

5 a virtual gateway accessing said protocol conversion information upon receipt of a message to be transmitted between said virtual devices and converting the protocol of said message to a protocol compatible with the network to which said message is being sent.

In still yet another aspect of the present invention there is provided a A  
10 communication system comprising:

a wireless network;

at least one wireless terminal to transmit messages over said wireless network;

a land-line network;

15 at least one host computer connected to said land-line network to transmit messages over said land-line network; and

a communication server providing communications connectivity for messages to be transmitted from one network to the other, wherein said at least one wireless terminal and said communication server include registries, said registries

20 including mapping information to map physically said at least one wireless terminal to said land-line network to enable messages transmitted by said at least one wireless terminal to be delivered to said at least one host computer.

The present invention provides advantages in that communications connectivity between physical devices on a wireless network and physical devices on  
25 a land-line network is maintained even though the API data of physical devices may not provide for direct communications connectivity. In addition, the present invention provides advantages in that the communication server includes a knowledge base to deal with "special" communication protocol conditions as they arise.

### 30 **BRIEF DESCRIPTION OF THE DRAWINGS**

An embodiment of the present will now be described more fully with reference to the accompanying drawings in which:

Figure 1 is a schematic block diagram of a communication systems including a communication server in accordance with the present invention;

Figure 2 illustrates the network infrastructure of the communication system of Figure 1;

5           Figure 3 illustrates message structure in the communication system of Figure 1;

          Figure 4 illustrates a communication system including a communication server acting between wireless terminals on a wireless packet data network and host computers on land-line wired networks in accordance with the  
10   present invention;

          Figure 5 is a schematic block diagram of one of the wireless terminals in the communication system of Figure 4;

          Figure 6 shows outgoing message flow in the wireless terminal of Figure 5;

15           Figure 7 shows incoming message flow in the wireless terminal of Figure 5;

          Figure 8 is a schematic block diagram of the communication server in the communication system of Figure 4;

          Figure 9 is another schematic block diagram of the communication  
20   server in the communication system of Figure 4;

          Figure 10 is a schematic block diagram of a virtual gateway forming part of the communication server of Figures 8 and 9;

          Figures 11 to 13 are block diagrams showing message processing in the virtual gateway of Figure 10;

25           Figure 14 shows communications connectivity between wireless terminals and host computers in the communication system of Figure 4; and

          Figure 15 shows an OSI model protocol stack and its conversions in the communications path across the communication system of Figure 4.

### 30   **BEST MODE FOR CARRYING OUT THE INVENTION**

          In the well known OSI Reference Model, every device that connects two computer systems or networks, that are not connected to each other, is referred to

as a relay. In accordance with this terminology, a bridge functions as a data link layer relay. A router represents a network layer relay, and a gateway is any relay at a layer that is higher than the network layer. Nonhomogeneity and a broad variety of differences between interconnected networks needs to be resolved by numerous functions performed by these relays in order to achieve connectivity. Some of those tasks to be resolved are: a) routing techniques; b) error control; c) flow control; d) user access control; e) close procedures; f) communication monitoring and traffic handling; g) statistics; and h) network efficiency to name but a few. The present invention relates to a communication server, which provides communications connectivity between wireless and/or land-line networks.

Turning now to Figures 1 and 2, a communication system in accordance with the present invention is shown and is generally indicated to by reference numeral 10. As can be seen, communication system 10 includes a communication server 12 communicating with physical devices 14. The physical devices 14 include wireless terminals 16 such as point-of sale terminals or the like as well as host computers 18. The wireless terminals 16 communicate with the communication server 12 over a wireless packet data network (WPDN) 20. In this particular example, the WPDN is a DataTAC (ARDIS) based network. The host computers 18 communicate with the communication server 12 over land-line based networks 22 such as for example, X.25 and TCP/IP protocol based networks.

During communications between communicating physical devices 14 in the communication system 10, application (API) messages AMSGs are exchanged between the physical devices for processing. On the wireless network side, the API messages AMSGs are transmitted as logical messages LMSGs. The logical messages include the API messages to be processed as well as destination information for the API messages. In this manner, the communication server 12 can determine the desired destination of the API messages as well as their required form when passed to the desired destination. Specifically, API messages AMSGs transmitted over the WPDN 20 are wrapped with virtual device message headers VMSG\_HDRs and with logical message headers LMSG\_HDRs. API messages AMSGs transmitted over the land-line network 22 are not wrapped. Although not shown, API messages AMSGs may also be wrapped only by virtual device message headers VMSG\_HDRs. Figure

3 shows wrapped API message AMSGs. The communication server 12, which receives all API messages transmitted between physical devices 14, unwraps and wraps API messages and performs API message protocol conversion, when required, thereby to provide communications connectivity between the physical devices 14.

- 5           The wireless terminals 16 follow a logical model consistent with the communication server 12. The host computers 18 on the other hand do not follow the logical model followed by the wireless terminals 16 and communication server 12. Thus, communications through the communication server 12, between a wireless terminal 16 and a host computer 18, are based on communications between a "known application" and an "unknown host" "Unknown" in the context of the present application refers to the fact that the communication server 12 only knows the basic API levels of the host computers 18. Since the host computers 18 are typically managed by third party institutions, there is little that can be done to change their API levels to allow them to communicate directly with the wireless terminals 16.
- 10           Therefore, this poses a potential communications problem especially when a message is transmitted from a host computer 18 that is to be delivered to a wireless terminal 16.

- According to Tanenbaum, every communication entity within a communications environment has to be identified in order to establish communications with other entities. Three terms that are applicable to this concept are names, addresses, and routes. The important step in this concept is the logical address which leads to the concept of an API logical message generated on an API level.
- 20           In the present communications system 10, the above-identified potential communications problem between host computers 18 and wireless terminals 16 is overcome by the communication server 22 which wraps and unwraps API messages as required to establish two way logical communications between the host computers 18 and wireless terminals 16

- To achieve communications in the communication system 10, physical devices 14 taking part in the communications require unique logical addresses. Each logical address comprises three identification levels (IDs), namely a system ID, an application ID and a component ID. The general format for the logical address is:
- 25           potential communications problem between host computers 18 and wireless terminals 16 is overcome by the communication server 22 which wraps and unwraps API messages as required to establish two way logical communications between the host computers 18 and wireless terminals 16
- 30           To achieve communications in the communication system 10, physical devices 14 taking part in the communications require unique logical addresses. Each logical address comprises three identification levels (IDs), namely a system ID, an application ID and a component ID. The general format for the logical address is:



**System ID. Application ID. Component ID.**

The system IDs identify systems within the logical model. The length of the system ID (i.e. its number of bytes) depends on inputs and designates many of the systems. The application IDs identify the logical units within the communication system 10, including the wireless terminals 16, the communication server 12 and the host computers 18. Basically all participants in the communication system 10 are assigned an application ID. This is an abstract definition, which does not care about physical connections. The component IDs identify all components within the logical units such as drivers, communication managers, bank credit components, bank debit components, etc.

The logical model enables logical connectivity among everything participating in communications over the communication system 10. It is important to note that this connectivity is not physical connectivity. This is API logical connectivity established in order to enable API messages to flow freely over the communication system.

Turning now to Figure 4, a specific implementation of the communication system in accordance with the present invention is shown and is generally indicated to by reference numeral 110. As can be seen, the communication system 110 includes a communication server 112 incorporating a server 124 and a backup server 126 interconnected via an Ethernet backbone 128. Workstations 130 are also connected to the communication server 112 by way of an Ethernet based network 132.

The communication server 112 is connected to a land-line based wired network 122 on one side and to a wireless packet data network (WPDN) 120 including a plurality of WPDN base stations 162 on the other side. The land-line based network 122 includes a plurality of physical devices 14 such as host computers 140, 142, and 144 respectively, connected to the communication server 112 by way of an X.25 land-line packet data network 146. The land-line based network 122 also includes additional host computers 150 (only one of which is shown) connected to the communication server 112 by way of a TCP/IP protocol network 152.

The WPDN 120 includes a WPDN switch 160 acting between the communication server 112 and the WPDN base stations 162. Physical devices 14 in

the form of wireless terminals 164 communicate with the WPDN base stations 162 by way of wireless RF communications links 166.

Wireless terminals 164 communicate with the host computers 140 to 144 and 150 through the communication server 112 over the WPDN 120 and land-line network 122. Likewise the host computers communicate with the wireless terminals 164 over the same communication network. Wireless terminals 164 also communicate with other wireless terminals 164 via the communication server 112 over the WPDN 120. The host computers also communicate with each other via the communication server 112 over the land-line based network 122.

Further specifics of the communication system 110 and its operation will now be described.

### Wireless Terminals

Referring now to Figures 5 to 7, one of the wireless terminals 164 is schematically illustrated. As can be seen, the wireless terminal 164 includes a message dispatcher 200 connected to a communication manager 202 and to the various components 204 of the wireless terminal 164 via a software bus 207. The message dispatcher 200 and communication manager 202 manage message flow in the wireless terminal 164. Specifically, the message dispatcher 200 manages the registration and unregistration of components in the wireless terminal while the communication manager 202 handles incoming and outgoing logical messages.

The message dispatcher 200 includes a check registry 211 communicating with a message office 206 including an internal registry 208 and mailboxes 210. The communication manager 202 includes a check registry 220 communicating with a knowledge base 212 providing physical mapping to message destinations. The communication manager 202 includes an autobridge and autorouter 214, virtual ports 216, input/output device drivers 218 such as an RF modem, SPI bus, RS 232, etc.

The knowledge base 212 physically maps the virtual ports 216 and device drivers 218 of the wireless terminal 164 to logical destination addresses such as the ports on the communication server 112 that communicate with the X.25 packet data network 146, TCP/IP protocol network 152, Ethernet network 132 and the

WPDN 120. The knowledge base 212 requires administration and can be constructed or updated in different ways and by different sources. For example, the knowledge database 212 can be constructed or updated (i) locally by an application manager; (ii) remotely by an administrator; or (iii) on the "fly" (run-time) as a learning process.

5                   Figures 4 and 5 show internal outgoing and incoming message flow within a wireless terminal 164. When a component 204 of the wireless terminal 164 requires an outgoing API message to be sent, the API of the component 204 sends a request to the message dispatcher 200. The request is in the form of a SendPostMessage call and includes the component's handler, the message destination, the type of service requested and the message envelope or object. Upon receipt of the  
10                   message request, the message dispatcher 200 sends the API message to the check registry 211. The check registry 211 in turn examines the internal registry 208 of the message office 106 to determine if a destination mailbox 210 for the API message exists. If a destination mailbox 210 for the API message is found by the check  
15                   registry 211, the API message is internal. At this stage, a store service 209 stores the API message in the destination mailbox 210. The destination mailbox 210 in turn generates an event, which notifies the destination component of the wireless terminal 164 that a new API message is waiting. The message dispatcher 200 then sends a status return to the message sending component 204. When the destination  
20                   component receives the event, the API of that component retrieves the event via a GetMessage call and processes the API message.

                  If a destination mailbox 210 does not exist, the API message is external. At this point, the message dispatcher 200 conveys the API message to the communication manager 202. Upon receiving the API message, the check registry  
25                   220 within the communication manager 202 checks the external registry 212 to get connectivity information for the API message based on the message destination. If no entry is found in the external registry 220 for the API message, the API message is discarded and an error message is returned to the message dispatcher 200 which in turn notifies the message sending component 204.

30                   If connectivity information for the API message exists in the external registry 212, the API message and its connectivity information are passed to the autorouter 214 for processing. In response, the autorouter 214 returns a status

message to the message sending component 204 via the message dispatcher 200 and creates a logical message LMSG, which is passed to the appropriate device driver 218 based on the connectivity information. The device driver 218 sends the logical message LMSG to the physical output port allowing the logical message to be sent  
5 over the WPDN 120.

When an incoming logical message is received on an output port of the wireless terminal 164, the associated device driver 218 passes the incoming logical message LMSG to the check registry 220. The check registry 220 performs filtering and checking of the logical message based on information in the external registry 212  
10 associated with the message sending party. If the logical message is not recognized, it is discarded by the check registry 220. During the checking and filtering of a recognized logical message LMSG, the check registry determines whether the message is to be processed by the autobridge 214 or conveyed as an API message to the message dispatcher 200. If the message is to be processed by the autobridge 214,  
15 the check registry 220 conveys the logical message to the autobridge which in turn routes the message to the proper device driver 218. Otherwise, the check registry 220 passes the API message to the message dispatcher 200.

When the message dispatcher 200 receives the API message from the communication manager 202, the check registry 211 checks the internal registry 208  
20 to find the correct mailbox 210 for the received API message. When the mailbox is found, the API message is passed to the store service 209, which stores the API message in the mailbox 210. The mailbox 210 in turn generates an event to notify the component 204 associated with the mailbox that a new API message has arrived. When the component 204 receives the event from the mailbox 210, the API of the  
25 component 204 retrieves the API message via a GetMessage call. The API message is then processed by the API.

### **Communication Server**

Referring now to Figures 8 and 9, the communication server 112 is  
30 better illustrated. As can be seen, the communication server 112 includes a front end in the form of a virtual host 280 communicating with the WPDN 120 and a back end in the form of a virtual terminal 282 communicating with the land-line based network

122. A virtual gateway 284 acts between the virtual terminal 282 and the virtual host 280. The virtual gateway 284 accesses a knowledge base 286 including a real time database. Rather than using hard-coding translation in the virtual gateway 284 to deal with different protocols used by the WPDN 120 and the land-line networks 122, the  
5 information required to translate protocols is recorded in the real time database of the knowledge base 286.

Turning now to Figure 10, the virtual gateway 284 is better illustrated. Virtual gateway 284 includes a preprocessor 300 receiving input from a virtual device VD (either the virtual host 280 or the virtual terminal 282) that receives logical  
10 messages from a sending physical device 14. The preprocessor 300 communicates with the knowledge base 286 and with a processor 302. Processor 302 also communicates with the knowledge base 286 as well as with a postprocessor 304. The postprocessor 304 communicates with the knowledge base 286 and provides output to a virtual device VD (either the virtual host 280 or the virtual terminal 282). The  
15 virtual device VD in turn sends a logical message to a receiving physical device 14 (either the virtual host 280 or the virtual terminal 282). An expert system tool kit 306 allows the knowledge base 286 to grow to meet the needs of the communication system 110.

The knowledge base 286, excluding the real time database, is divided  
20 into three parts, namely a registry, a static logical table and a dynamic database. The registry records basic information for each registered physical device 14 in the communication system 110. Each record in the registry includes a physical device ID, an application ID, a virtual device ID and a device properties ID. This information is entered into the knowledge base when the physical devices are registered. The  
25 registry also contains mappings from physical IDs to logical IDs. Each mapping represents one application of the registered physical device. Therefore, if the physical device uses two applications through the virtual gateway 284, two mappings associated with the physical device exist in the registry.

The static logic table stores logical information with respect to  
30 registered connections including logical connection IDs, logical device IDs, virtual device IDs, API IDs, logical message wrapping information, logical message unwrapping information, virtual device message wrapping information, virtual device

message unwrapping information, knowledge base IDs, virtual processor IDs and processor property IDs.

The dynamic database contains dynamic information. It is a real time database that updates the current status of each connection between physical devices  
5 in the communication system 112. Entries in the dynamic database include knowledge base IDs, logical connection IDs, connection status and current state.

The preprocessor 300 receives virtual device messages VDMSGs from either the virtual terminal 282 or virtual host 280 in response to logical messages LMSGs received by a virtual device VD from a physical device 14 such as a wireless  
10 terminal or a host computer. Messages received by the preprocessor 300 are conveyed to the processor 302. Following processing at the processor 302, the processed messages are conveyed to the postprocessor 304 which in turn passes the processed messages to either the virtual host 280 or virtual terminal 282. The virtual host 280 or virtual terminal 282 in turn passes the processed messages to the  
15 appropriate physical device 14.

The preprocessor 300 is designed to unwrap incoming messages and determine target logical connections for the incoming messages using a number of service processors as shown in Figure 11. When the preprocessor 300 receives a message from a virtual device VD together with its virtual device ID, the preprocessor  
20 300 separates the incoming virtual device message VDMSG into a virtual device message header VDMSG\_HDR and a logical message LDMSG (block 320). The logical message LDMSG is then further separated into a logical message header LDMSG\_HDR and an API message AMSG (block 322). After the incoming message has been unwrapped, the preprocessor 300 determines the target logical connection ID  
25 for the API message. Specifically, the preprocessor 300 first attempts to retrieve the target logical connection ID from the knowledge base 286 using the virtual device message header VDMSG\_HDR as a key (block 324). If the virtual device message header is absent or if retrieval of the target logical connection ID from the knowledge base 286 is not successful, then the preprocessor 300 attempts to retrieve the target  
30 logical connection ID from the knowledge base 286 using the logical message header LDMSG\_HDR as a key (block 326). If the logical message header is absent or if retrieval of the target logical connection ID from the knowledge base 286 is not

successful, the preprocessor 300 uses the API message AMMSG as a key to search the knowledge base 286 for the target logical connection ID (block 328). Once the target logical connection ID is located, it is passed to the processor 302 with the API message.

- 5                   When the processor 302 receives the API message and the target logical connection ID from the preprocessor 300, the processor 302 processes the API message. During processing, one of the business processors accesses appropriate protocol translation information in the knowledge base 286 based on the target logical connection ID. Once the translation information is accessed, another business
- 10   processor handles the protocol translation using the accessed information (see block 330 in Figure 12). This of course makes gateway connections between the communicating virtual devices VD through the virtual gateway 284 more efficient and flexible since any changes in protocols can be reflected by updating the knowledge
- 15   knowledge base 286, the virtual gateway 284 can be used to connect virtually any communicating physical devices. After processing, the processed API message is passed to the postprocessor 304 together with the target logical connection ID.

- When the postprocessor 304 receives the processed API message and the target logical connection ID from the processor 302, the postprocessor 304
- 20   retrieves logic message wrapping and virtual device wrapping from the knowledge base 286 based on the target logical connection ID and wraps the processed API message accordingly (see blocks 332 and 334 in Figure 13) thereby to form a virtual device message VDMSG. The destination virtual device is also retrieved from the knowledge base 286 using the target logical connection ID as a key and the virtual
- 25   device message VDMSG is conveyed to the appropriate destination virtual device.

- Since the wireless terminals 164 in this embodiment follow the same logical model as the communications server 112 and since logical messages transmitted by the wireless terminals include the target logical connection ID, logical
- 30   messages LMSGs received by the communication server 112 from wireless terminals can be processed easily and routed to the proper destination.

                  API messages destined for wireless terminals that come from "unknown" sources such as host computers, which do not include a logical message

header LMSG\_HDR, must be built into logical messages by the communication server 112. The business processors in the processor 302 use fuzzy logic and artificial intelligence to access the appropriate protocol information and build the logical messages. The tool kit 306 is used to initially build the knowledge base 286 so that it  
5 includes the basic API requirements of the host computers. As communications traffic passes through the communication server 112, the communication server 112 updates the knowledge base 286.

One special case that arises in communications between host computers and the communication server 112, is protocols with "zero messages".  
10 Protocols of this nature do not include API data. This of course prevents logical messages from being built. This is dealt with by the communication server 112 using the knowledge base 286.

As will be appreciated, since the knowledge base 286 stores connectivity information for the registered physical devices as well as protocol  
15 translation information and since logical messages transmitted by the wireless terminals 164 provide destination information, the communication server 112 is able to ensure communications connectivity between all physical devices in the communication system 112 regardless of network platforms.

In the present embodiment, the wireless network 120 is described as a  
20 DataTAC WPDN. DataTAC wireless packet switching data networks require 56 to 64 kbps backbone communication pipe per physical connection with SCR (standard context routing) over X.25, through PVCs (permanent virtual circuits) or SVCs (switched virtual circuits). The communication server 112 provides full connectivity to host computers via this communication path. Full connectivity is especially  
25 important in the case where the wireless terminals 164 transmit financial transaction data where ETE POS (end to end point of sale) protocol is a must. Unlike the communication server 112, DataTAC engine servers do not provide ETE connectivity.

The communication server 112 also supports other wireless networks such as for example Mobitex, CDPD, GSM or PCS. Mobitex wireless packet  
30 switching data networks are very similar to DataTAC WPDNs and therefore, the communication server 112 bridges the connectivity gap between this wireless network and land-line networks. CDPD wireless packet data networks are the most demanding



in terms of throughput and speed. These networks are entirely based on the TCP/IP protocols. GSM/PCS networks are circuit switched wireless cellular networks where again end to end (ETE) connectivity is an issue.

## 5 Connectivity

In addition to logical addressing, data exchange between a physical device 14 and the communication server 112 is another important part of the logical message. Data can be exchanged in two manners, namely asynchronously or synchronously. The logical message LMSG indicates which communication manner is supported and embeds this information into its header as a Type and Tag.

Asynchronous data exchange is datagram oriented. During asynchronous data exchange, a request datagram is sent to the communication server 112 by the physical device. The communication server 112 responds to this request by returning a respond datagram. Recognition of the "Request-Respond" handshake 15 in the logical message is done in the Tag field and is referred to as the handshake ID. The handshake ID is a unique ID and is returned by the communication server 112. The handshake ID value is within the range of 1 to 65535.

Synchronous data exchange is session oriented. During synchronous data exchange, a request message (it can be as the first message of the conversation) 20 to open a "conversation" session is sent to the communication server 112 by the physical device. The communication server 112 creates a session and its session ID is returned. During the conversation time via this session, both the physical device and the communication server 112 keep the same session ID until either the physical device decides to close the conversation or there is a communications problem at the 25 communication server 112. The session ID value is within the range of 1 to 32767 (2 bytes), where value 1 is a request to open a session and a negative value is a request to close a session. The value 0 is an invalid session ID.

The format of the logical message LMSG is as follows:

SID	Type	Tag	Src	Dst	API Message Body

SID represents a signature ID, that is calculated (CRC) from its header context. The field is used to recognize third party messages. The remaining fields support logical connectivity and the API data exchange mechanism.

Type is a message type indicator to recognize a data exchange mechanism. It reflects the manner between which two API components will cooperate.

Tag represents additional run-time information regarding to the type of the logical message. This tag ID is a unique conversation number between the two API components.

10 The datagram communication mechanism is as follows:

Tag ID = 0, means invalid session ID; and

Tag ID = 1 < Handshake ID < 65535.

The session (message) communication mechanism is as follows:

Tag ID = 0, means invalid session ID;

15 Tag ID = 1, means request to open session, or the first message;

Tag ID = 1, < Session ID < 32767 means a valid session; and

Tag ID = - 32767 < Session ID < -1, request to close a session, or the last message.

20 Src: is a logical address of the source and Dst. is a logical address of the destination.

The format of the API message AMMSG is as follows:

<b>EXT</b>	<b>D/M</b>	<b>Duplicate</b>	<b>Reserve</b>	<b>Reserve</b>	<b>b2</b>	<b>b1</b>	<b>b0</b>
------------	------------	------------------	----------------	----------------	-----------	-----------	-----------

Ext is an extension bit to allow insertion of another header,

D/M is the datagram or message;

25 Duplicate is a logical message duplicate; and

b2, b1 and b0 are bits describing data exchange.

Figures 14 and 15 show communications connectivity between wireless terminals and host computers in the communication system 110 including the OSI model protocol stack and its conversions across the communications path.

Many wireless networks provide for "fleet connectivity" (one to many).

Fleet connectivity cares only about the destination. This is a synchronous protocol.

Between the communication server 112 and the WPDN switch 160, messages are routed via SVC's (switchable virtual circuits) located in the so called SVC SINK.

- 5 SVC concept comes from the packet data networks (like X.25). The communication server 112 and the host computers communicate synchronously via dedicated SVCs. That means that a limited number of SVCs have to handle many wireless terminals. This traffic is handled by the communication server 112.

- Communication server 112 enables three types of connectivity through  
10 the SVCs and enhances communication throughput, namely device connections, sessions connections and asynchronous datagram messaging. Asynchronous datagram messaging follows the dynamics of the traffic and accommodates any increase in the traffic. A limited number of SVCs provide throughput for a much larger number of wireless terminals. Device connection is permanent-static (terminal  
15 corresponds to the specific SVC). Session locks communication SINK only temporarily.

### **End-To-End Communications**

- For example, for a host computer to host computer connection through  
20 the communication server 112, the source host computer transmits an API message to the communication server 112 without any wrapping. After the API message passes through the virtual terminal 282, the API message as well as the virtual device ID of the virtual terminal 282 is sent to the preprocessor 300. As mentioned previously, the preprocessor attempts to extract the virtual device message header VDMMSG\_HDR and  
25 the logic message header LMSG\_HDR from the API message. In this case, the preprocessor 300 recognizes that the API message does not include a virtual message header or a logical message header. The preprocessor 300 in turn analyzes the API message and interacts with the knowledge base 286 to determine the target logical connection ID for the API message. After the target logical connection ID is located,  
30 it is sent with the API message to the processor 302. The processor 302 passes the API message to the business processors therein which in turn process the message to ensure the API message protocol is compatible with that used by the destination host

computer. The processed API message is then passed to the postprocessor 304 with the target logical connection ID. The postprocessor uses the target logical connection ID as a key to search the knowledge base 286 for wrapping information. In this case, since the destination is a host computer, no wrapping is required. The postprocessor 304 in turn uses the target logical connection ID to find the destination virtual device, in this case the virtual terminal 282, and passes the API message to it. The virtual terminal 282 in turn passes the API message to the destination host computer over the land-line network 122.

If a wireless terminal 164 has established a connection with a host computer, logical messages generated by the wireless terminal are sent to a network provider that connects to the communication server 112 to the WPDN 36. Logical messages transmitted by the wireless terminal 164 to the host computer include a virtual device message header VDMMSG\_HDR. The logical message LMSG includes a logical message header LMSG\_HDR and the API message. The messages received by the virtual host 280 from the wireless terminal 164 are passed to the preprocessor 300. The preprocessor 300 extracts both the virtual device message header VDMMSG\_HDR and the logical message header LMSG\_HDR from the API message. The preprocessor 300 then analyzes the virtual device message header for the source physical device ID. It then uses the physical device ID as a key to search the knowledge base 286 for the registered target logical connection ID. If there is more than one target logical connection ID in the knowledge base 286 registered with the physical device ID, then the preprocessor 300 analyzes the logic message header LMSG\_HDR to determine the source and destination logical IDs. This information is then used to search the knowledge base 286 to determine the target logical connection ID. After the target logical connection ID is located, the target logical connection ID is sent to the processor 302 together with the API message. The business processors in the processor in turn process the API message as described previously. The processed API message is then passed to the postprocessor 304 together with the target logical connection ID. The postprocessor 304 uses the target logical connection ID as a key to search the knowledge base 286 for wrapping information. In this case, since the destination is a host computer, no wrapping is required. The postprocessor 304 in turn uses the logical connection ID to find the target virtual device, in this case

the virtual terminal 282, and passes the message to it. The virtual terminal 282 in turn passes the API message to the destination host computer over the land-line network 122.

If a wireless terminal 164 is communicating with another wireless  
5 terminal, messages are sent from the source wireless terminal through the WPDN 120 to the communication server 112. Since a wireless terminal is transmitting messages, the virtual host 280 receives virtual device messages which include a virtual device message header and a logical message. The logical message includes a logical message header and the API message. The message is processed in the manner  
10 described above by the preprocessor 300 and the processor 302. However, when the postprocessor 304 receives the target logical connection ID and the processed API message, it uses the target logical connection ID as a key to search the knowledge base 286 for wrapping information. In this case, since the destination is a wireless terminal, both logical message and virtual device message wrapping are required. The  
15 postprocessor 304 in turn receives the wrapping information from the knowledge base and wraps the API message in the appropriate manner before passing the wrapped message to the virtual host 280 for transmission over the WPDN 120 to the destination wireless terminal.

Those of skill in the art will appreciate that the present invention  
20 provides advantages in that communications connectivity between physical devices is maintained even though the networks to which the physical devices are connected implement different API protocols.

Although a preferred embodiment of the present invention has been described, those of skill in the art will appreciate that variations and modifications  
25 may be made without departing from the spirit and scope thereof as defined by the appended claims.

**WHAT IS CLAIMED IS:**

1. A communication system comprising:  
at least two communication networks over which communications  
5 between physical devices connected to said communication networks are to be carried, said communication networks implementing different protocols for messaging; and  
a communication server acting between said communication networks and through which messages transmitted between said communication networks pass,  
10 said communication server including a knowledge base storing protocol conversion information, said communication server accessing said protocol conversion information in said knowledge base upon receipt of a message and converting the protocol thereof to a protocol compatible with the communication network to which said message is being sent.  
15
2. A communication system as defined in claim 1 wherein said communication server includes virtual devices communicating with said communication networks and a virtual gateway bridging said virtual networks, said virtual gateway accessing said knowledge base and converting protocols of said  
20 messages.
3. A communication system as defined in claim 2 wherein said virtual gateway includes a preprocessor, a processor and a postprocessor, said preprocessor examining each incoming message to locate target logical connection information  
25 determining the target destination for said incoming message, said processor converting the protocol of each incoming message, where appropriate, based on said target logical connection information, said postprocessor wrapping each message received from said processor with headers, where appropriate.
- 30 4. A communication system as defined in any of the preceding claims wherein one of said communication networks is a wireless network and wherein one of said communication networks is a wired land-line network.

5. A communication system as defined in claim 4 wherein messages transmitted over said wireless network, include API messages to be processed by destination physical devices and target logical connection information specifying the destinations for said API messages.

6. A communication system as defined in claim 5 wherein said target logical connection information is including in a logical message header wrapping said API message.

10

7. A communication system as defined in claim 6 wherein said preprocessor strips the logical message header from said API message upon receipt of a message from said wireless network and uses said logical message header as a key to search said knowledge base for said protocol conversion information.

15

8. A communication system as defined in claim 7 wherein said preprocessor analyzes the API message of a message received from said wireless network for said target logical connection information if said target logical connection information cannot be determined from said logical message header.

20

9. A communication system as defined in any one of claims 4 to 8 wherein messages transmitted over said land-line network are in the form of API messages, said preprocessor analyzing the API message of a message received from said land-line network for said target logical connection information.

25

10. A communication server to act as a gateway for the transmission of messages between two virtual devices communicating with networks implementing different protocols, said communication server comprising:

30 a knowledge base storing protocol conversion information to convert messages of one protocol to a different protocol; and  
a virtual gateway accessing said protocol conversion information upon receipt of a message to be transmitted between said virtual devices and converting the

-22-

protocol of said message to a protocol compatible with the network to which said message is being sent.

11. A communication server as defined in claim 10 wherein said virtual  
5 gateway includes a preprocessor, a processor and a postprocessor, said preprocessor  
examining each incoming message to locate target logical connection information  
determining the target destination for said incoming message, said processor  
converting the protocol of each incoming message, where appropriate, based on said  
target logical connection information, said postprocessor wrapping each message  
10 received from said processor with headers, where appropriate.

12. A communication server as defined in claim 11 further including a tool  
kit to setup said knowledge base with said protocol conversion information.

13. A communication server as defined in claim 12 wherein said virtual  
15 gateway updates said protocol conversion information based on message traffic  
therethrough.

14. A communication server as defined in claim 11 wherein said  
20 preprocessor unwraps headers accompanying each incoming message and uses said  
headers as keys to search said knowledge base for said protocol conversion  
information.

15. A communication server as defined in claim 14 wherein said  
25 preprocessor analyzes the message for said target logical connection information if  
said target logical connection information cannot be determined from said headers.

16. A communication system comprising:  
a wireless network;  
30 at least one wireless terminal to transmit messages over said wireless  
network;  
a land-line network;



at least one host computer connected to said land-line network to transmit messages over said land-line network; and

a communication server providing communications connectivity for messages to be transmitted from one network to the other, wherein said at least one  
5 wireless terminal and said communication server include registries, said registries including mapping information to map physically said at least one wireless terminal to said land-line network to enable messages transmitted by said at least one wireless terminal to be delivered to said at least one host computer.

10 17. A communication system as defined in claim 16 wherein the registry in said at least one wireless terminal maps drivers and port of said wireless terminal to ports of said communication server.

18. A communication system as defined in claim 17 wherein the registry in  
15 said communication server maps logical connections between said wireless and land-line networks.

19. A communication system as defined in any one of claims 16 to 18 wherein said communication server includes a knowledge base storing protocol  
20 conversion information, said communication server accessing said protocol conversion information in said knowledge base upon receipt of a message and converting the protocol thereof to a protocol compatible with the network to which said message is being sent.

1/15

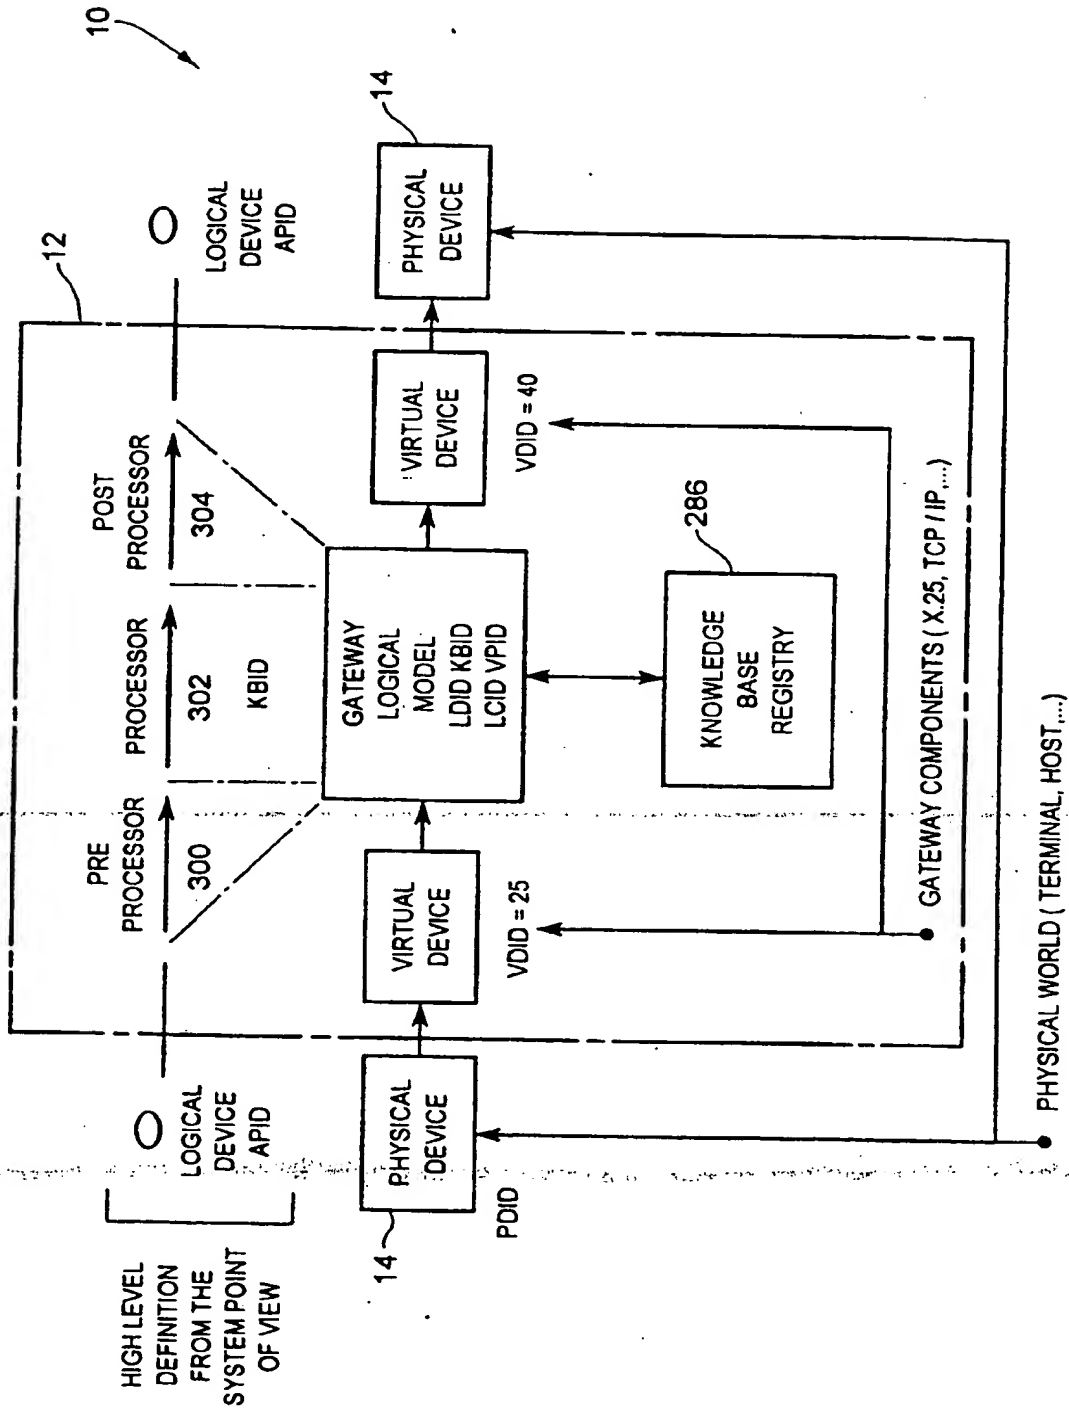
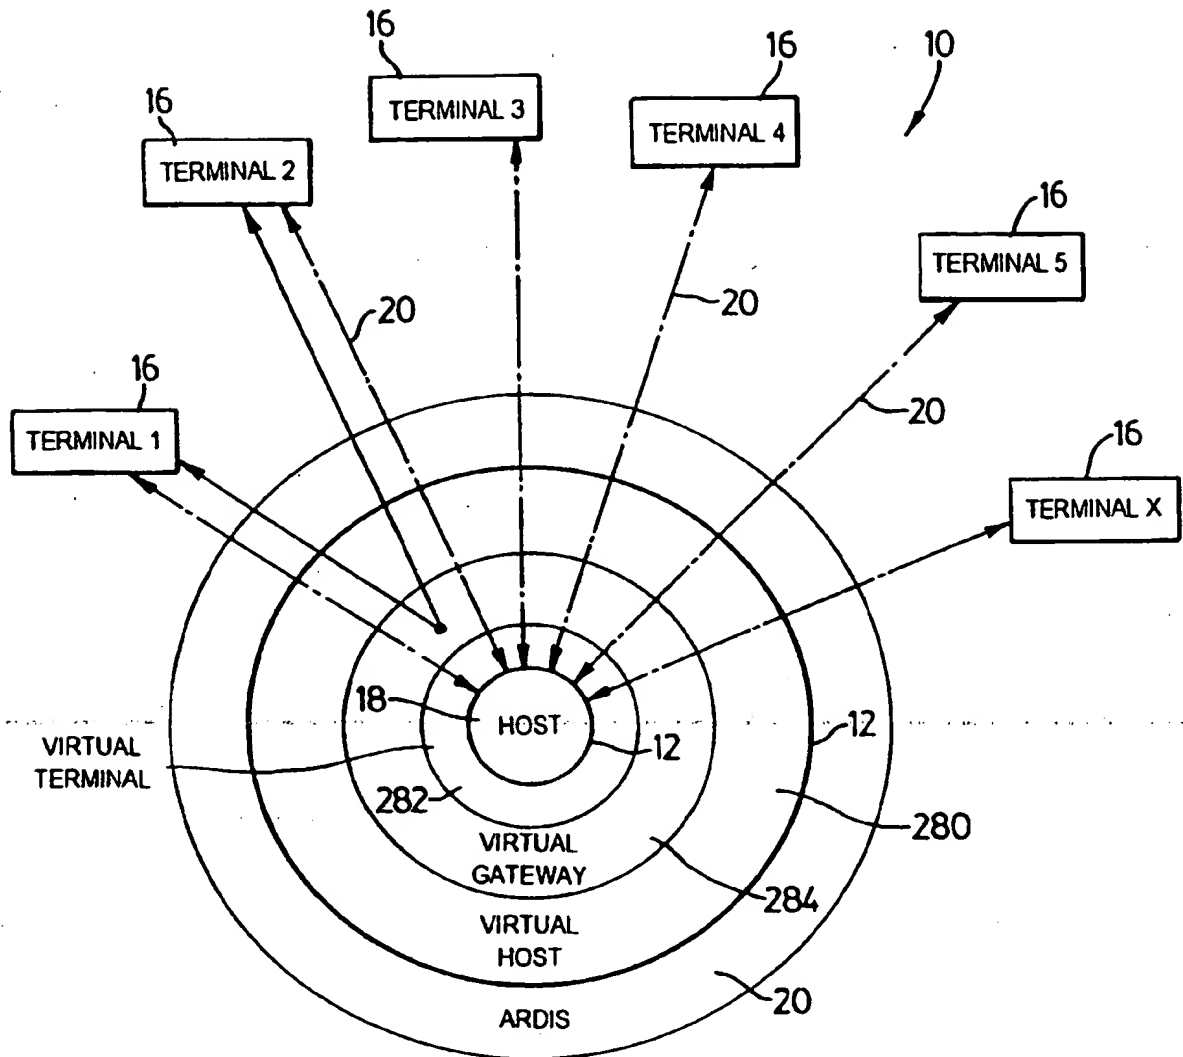


FIG. 1

2/15

FIG. 2

3/15


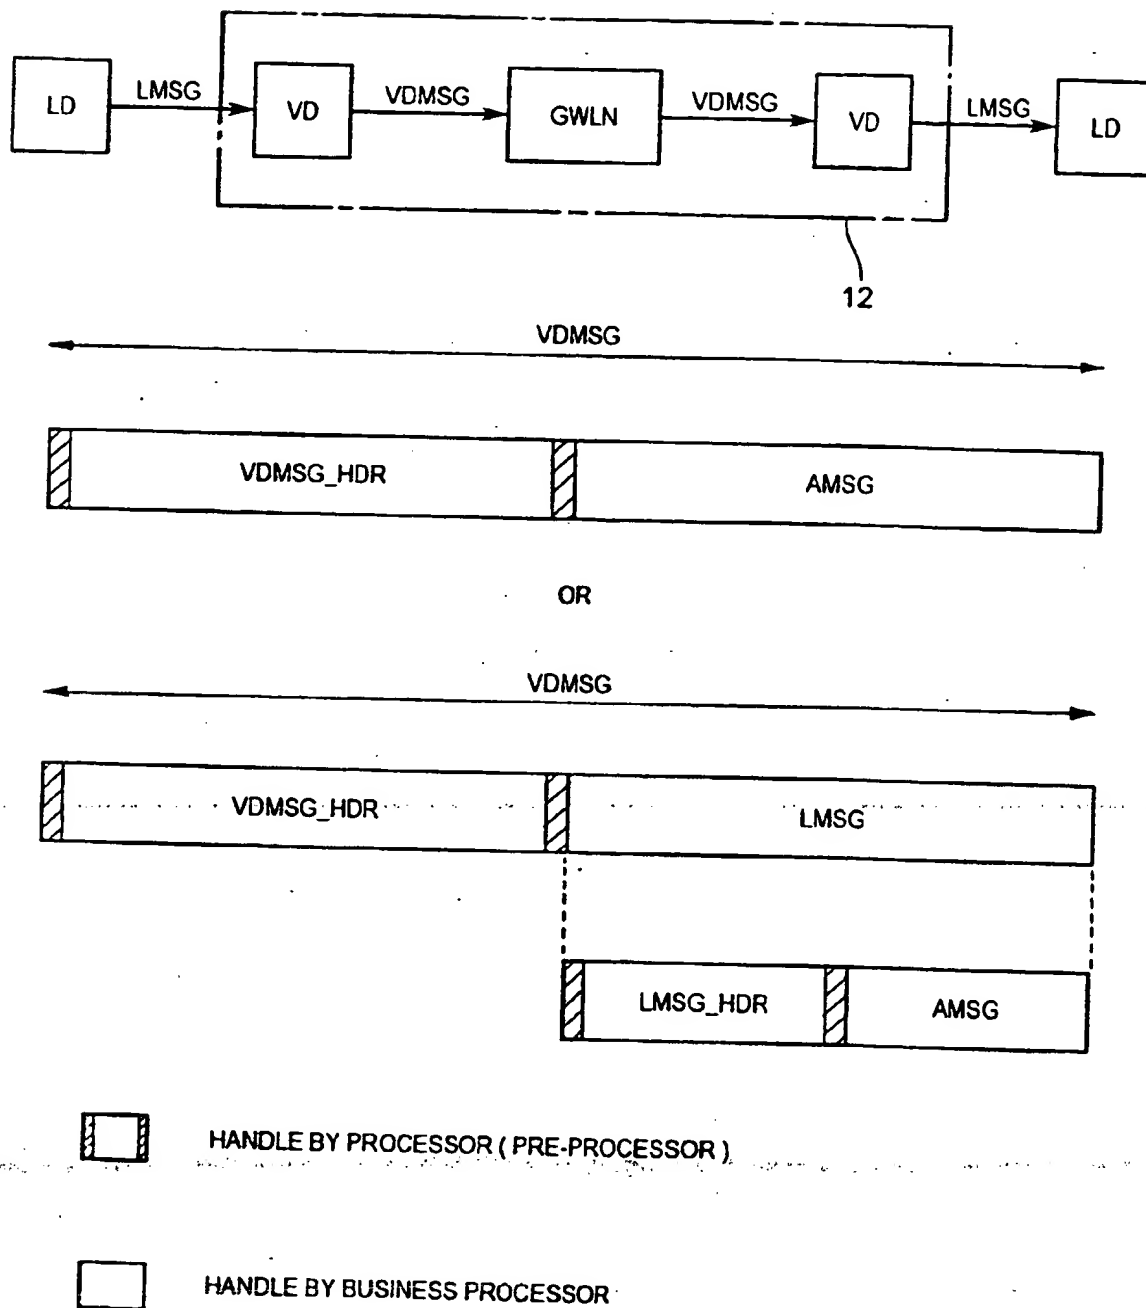



FIG. 3

SUBSTITUTE SHEET (RULE 26)

4/15

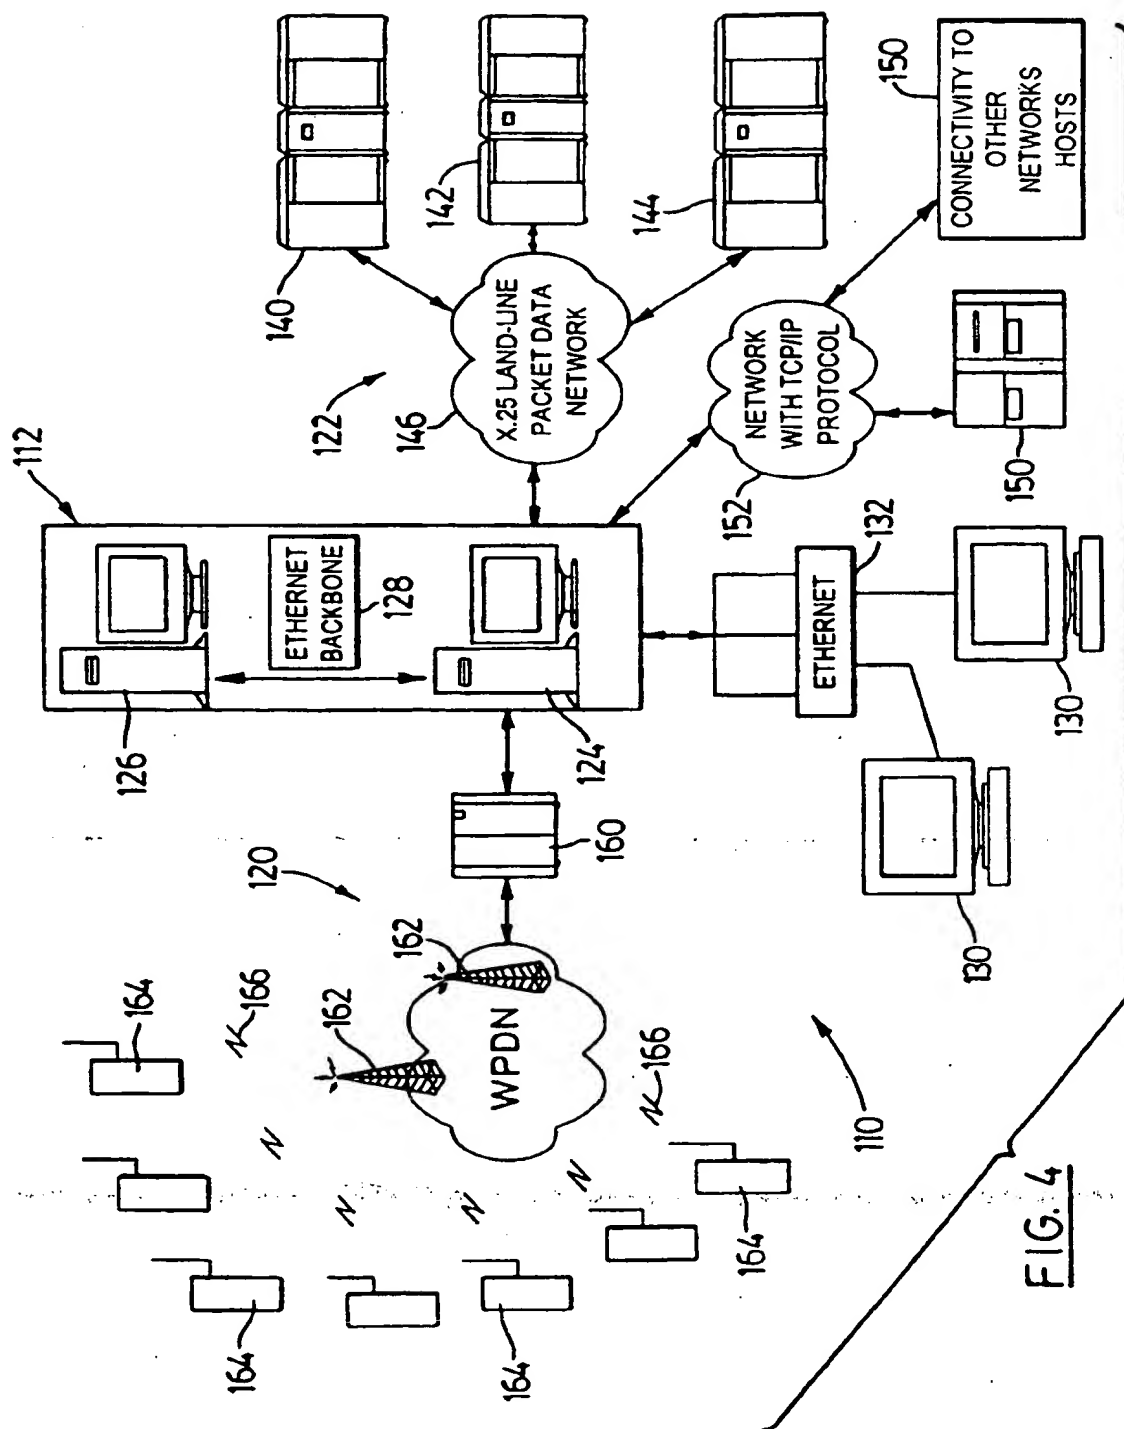

5/15

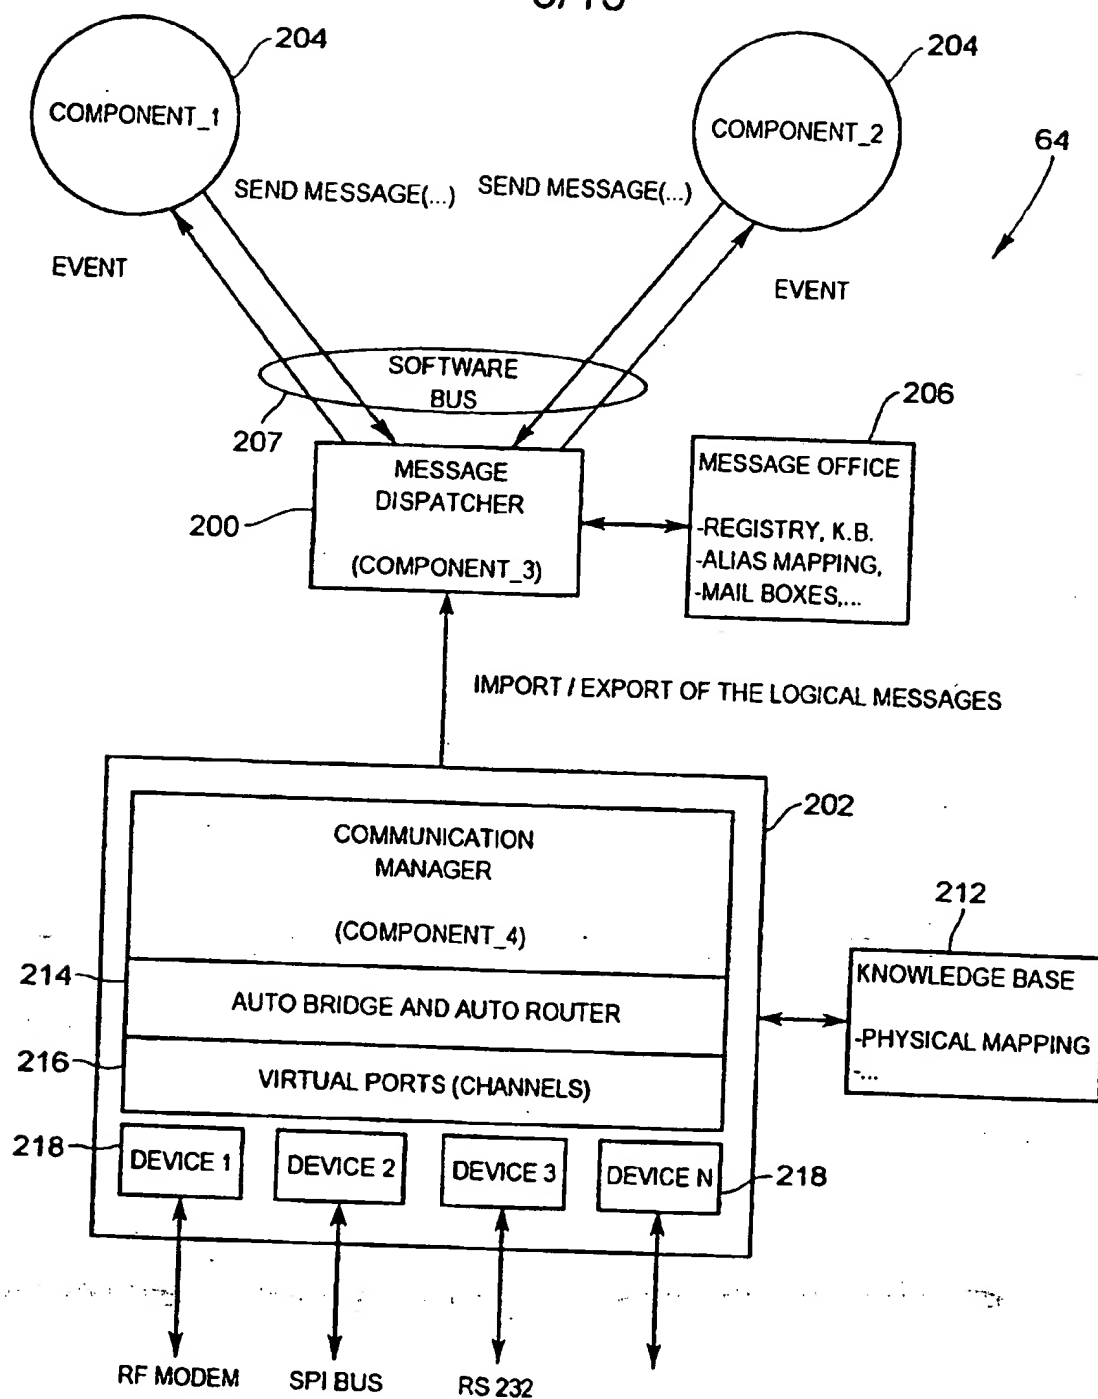**FIG. 5**

6/15

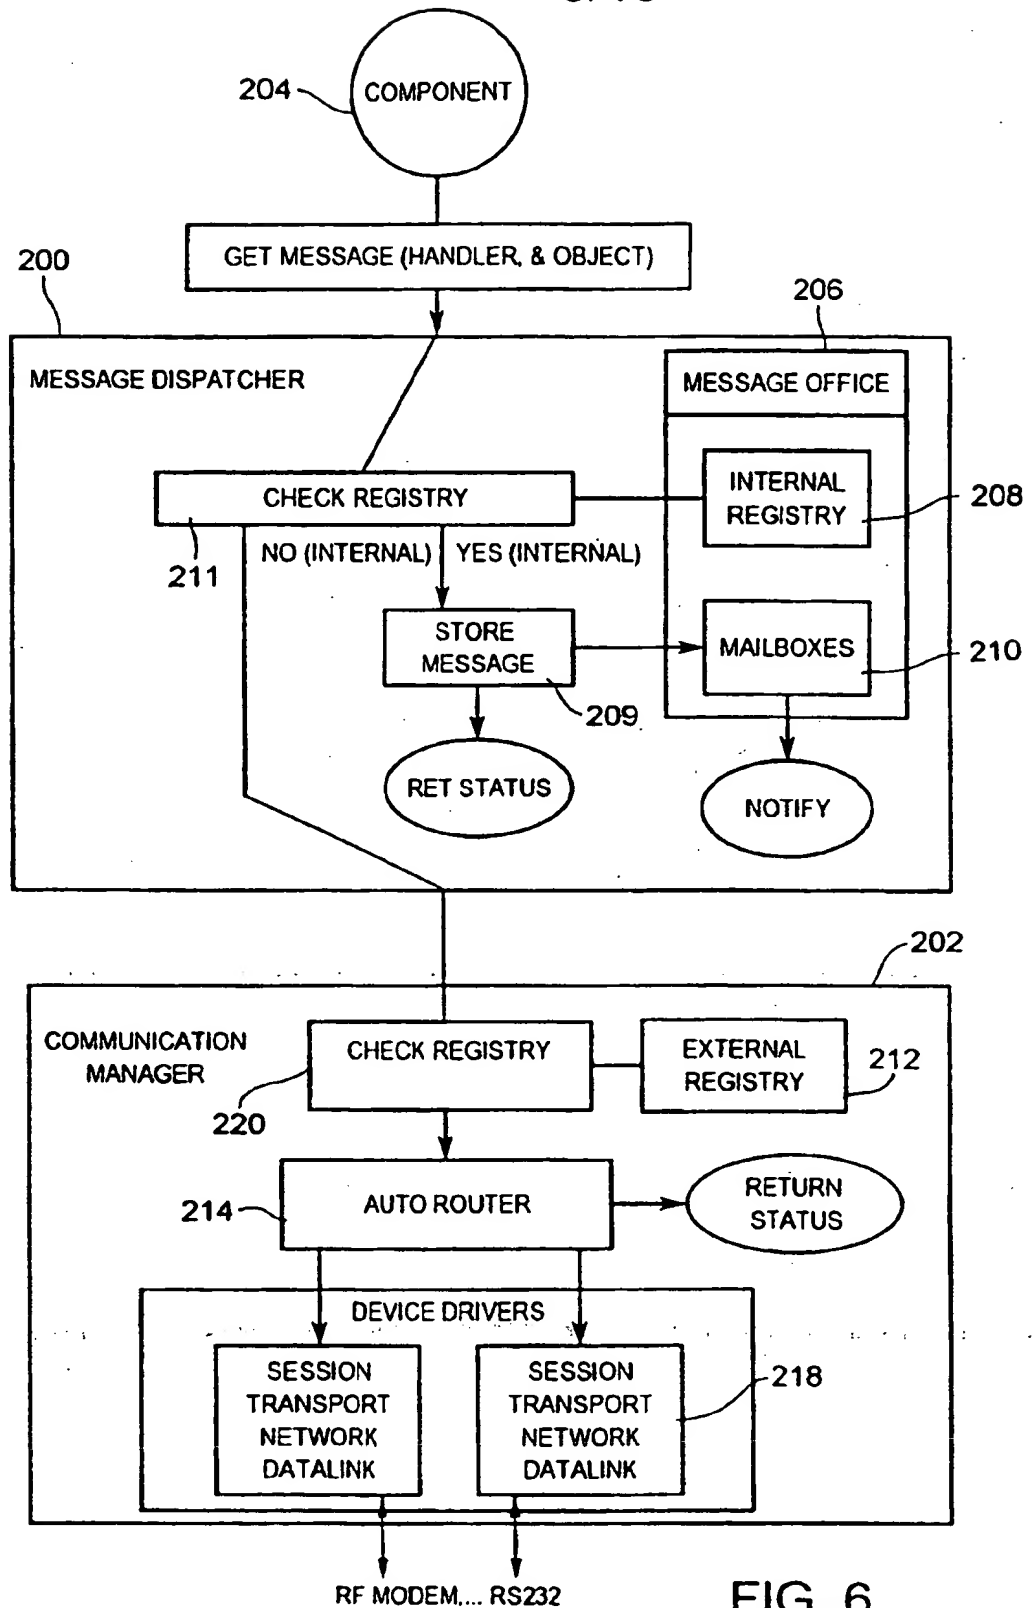


FIG. 6

7/15


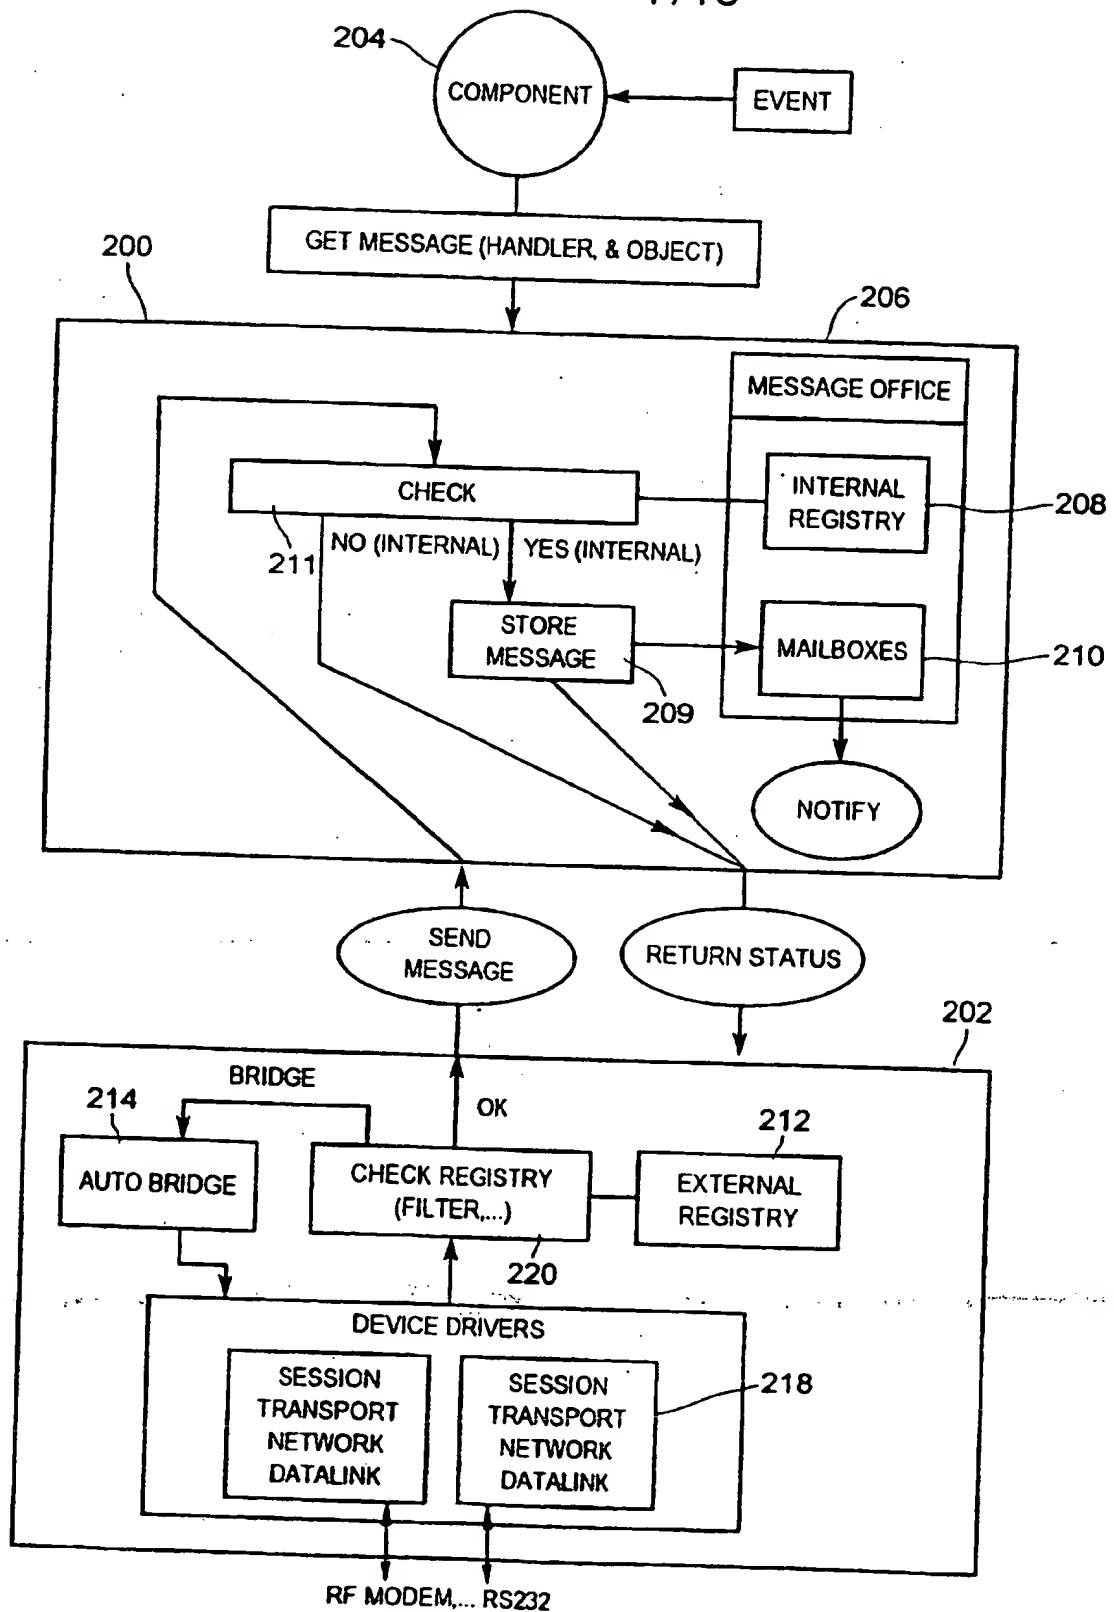


FIG. 7

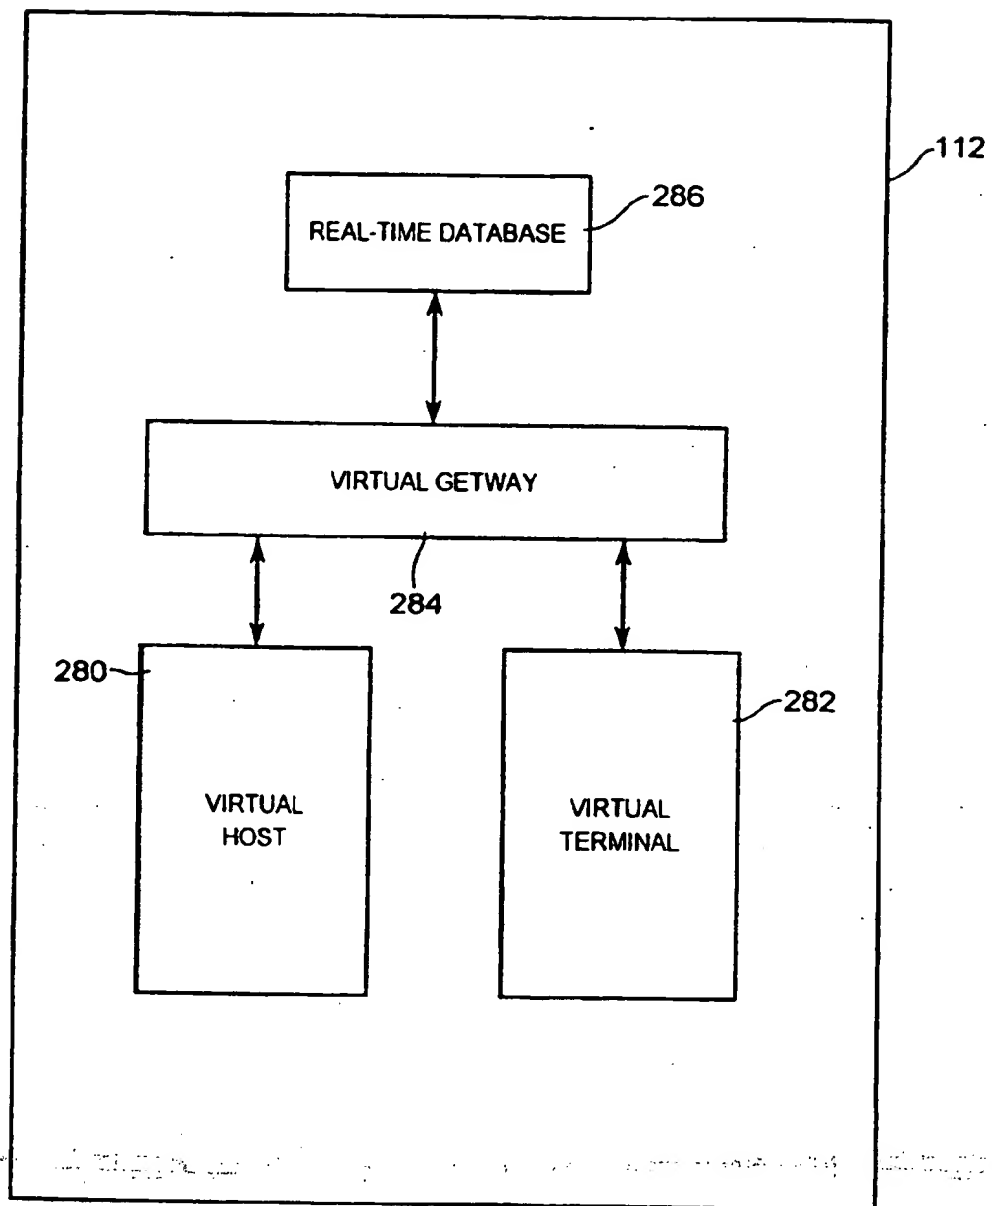

8/15

FIG. 8

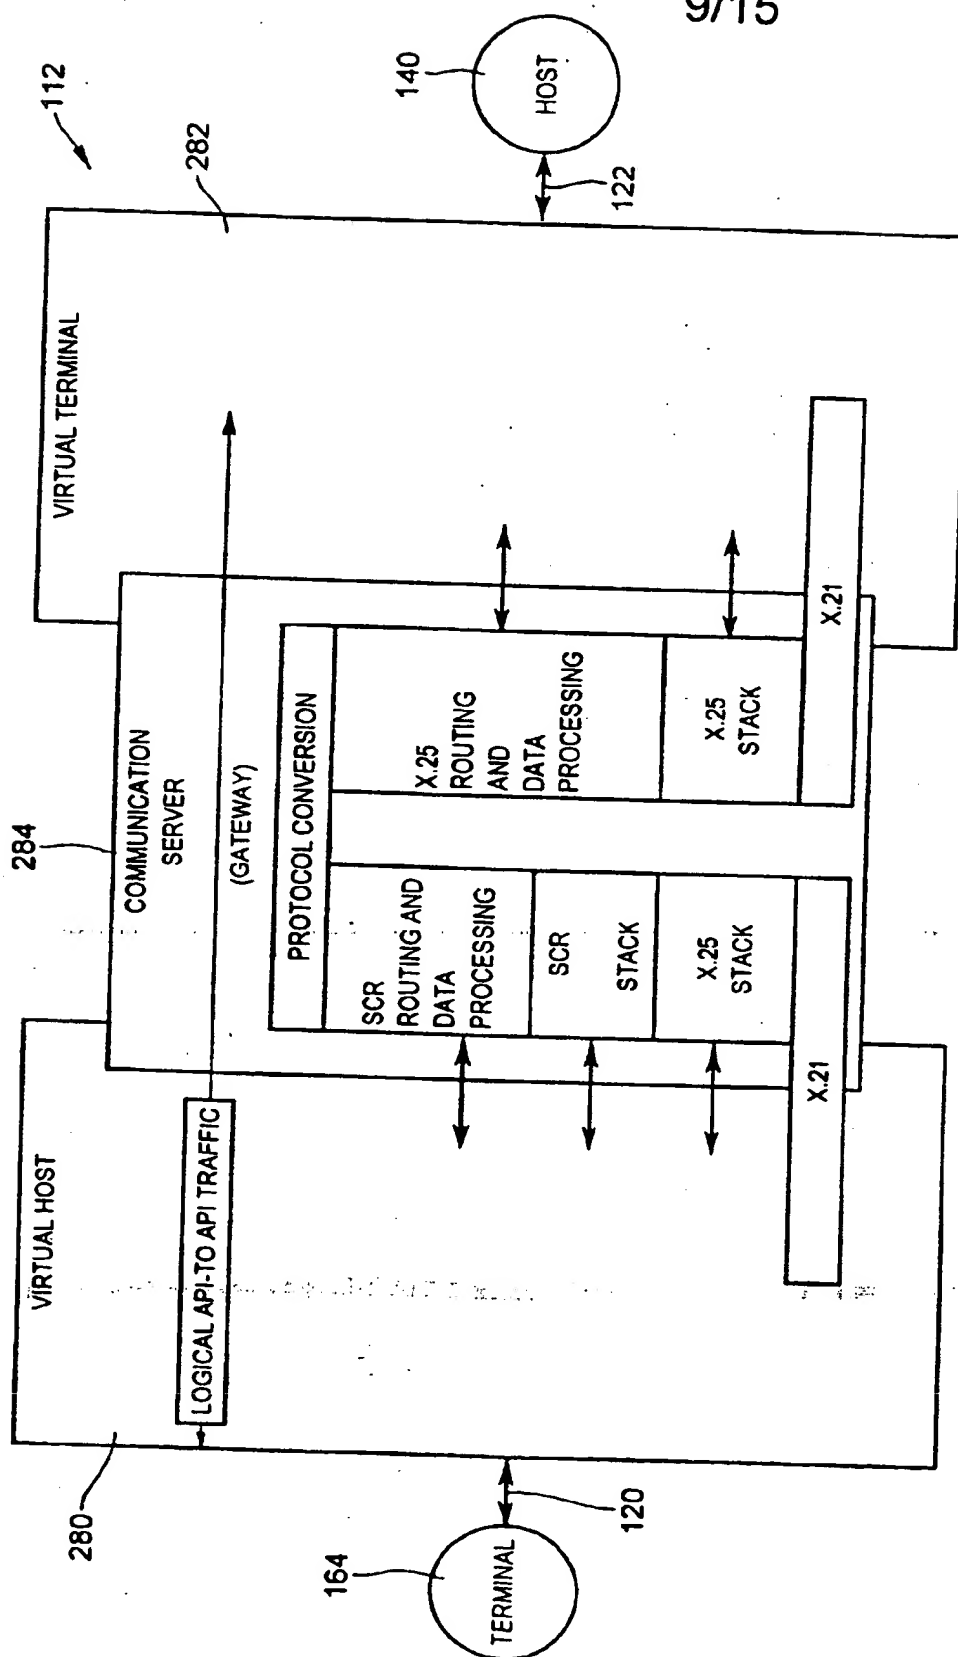
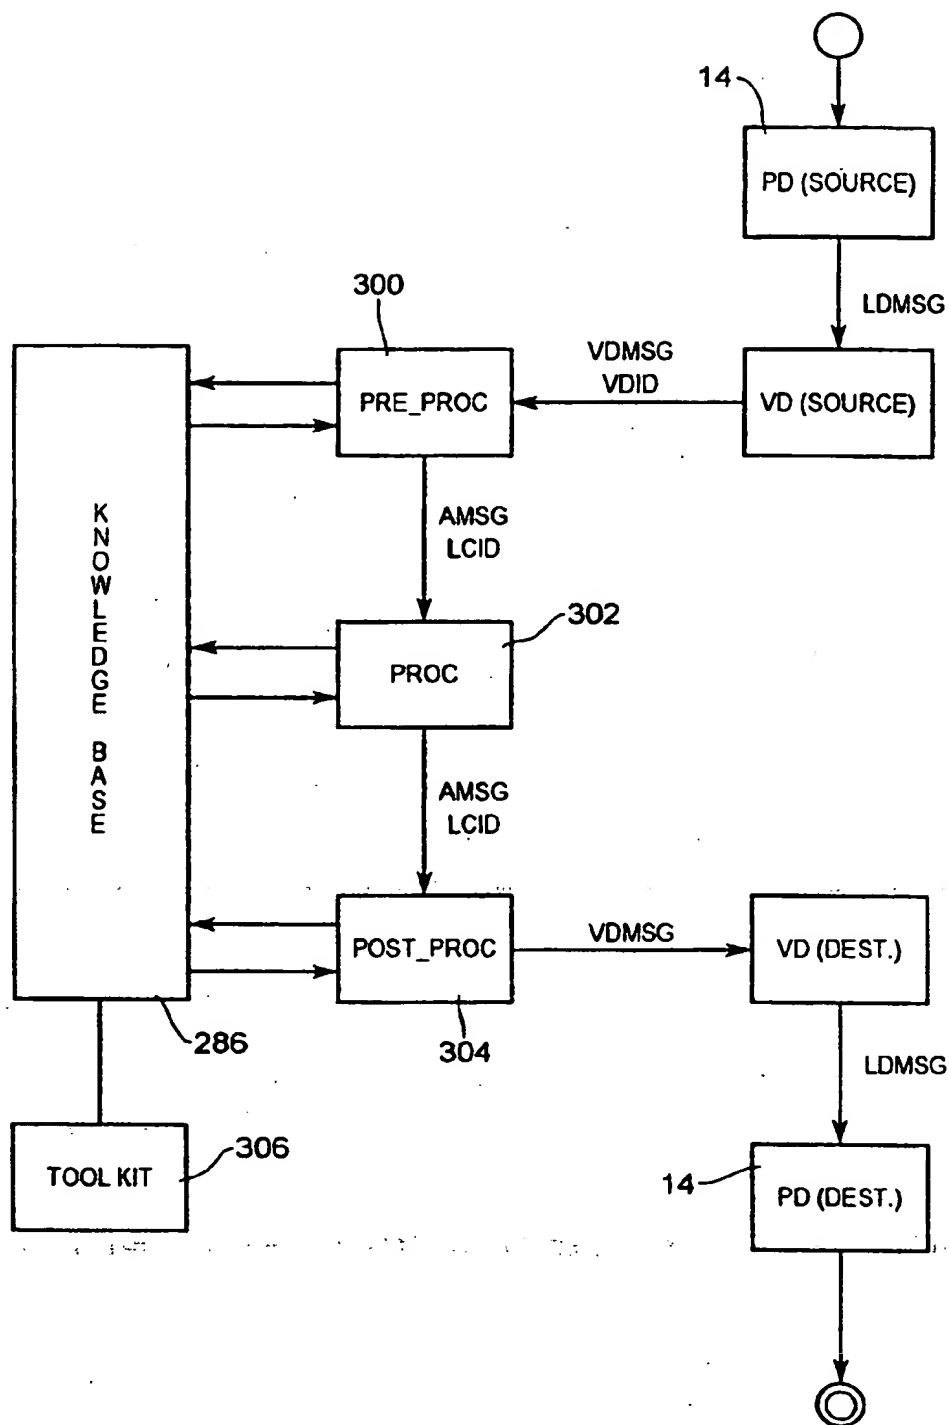


FIG. 9

10/15

**FIG. 10****SUBSTITUTE SHEET (RULE 26)**

11/15

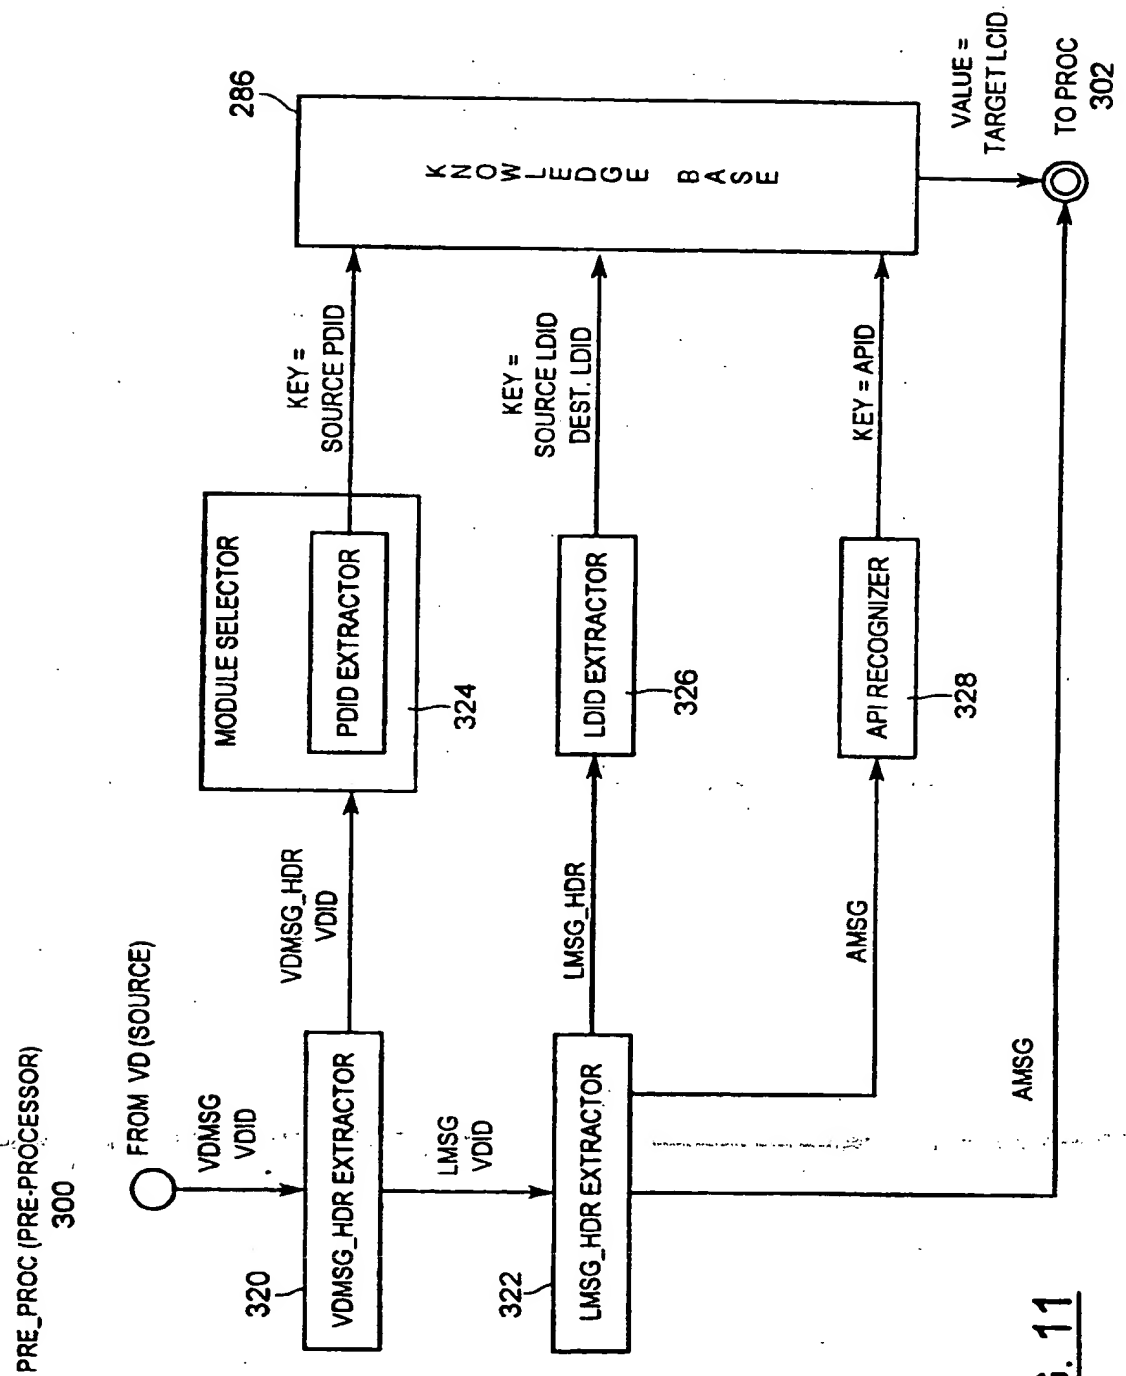
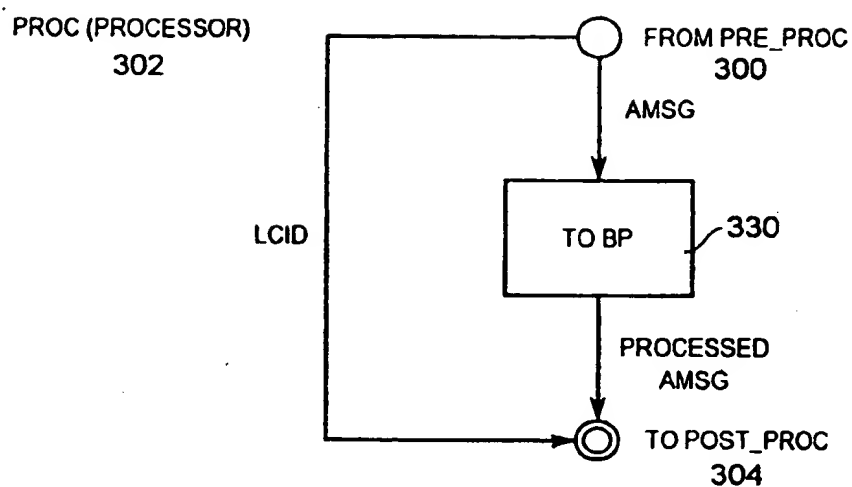
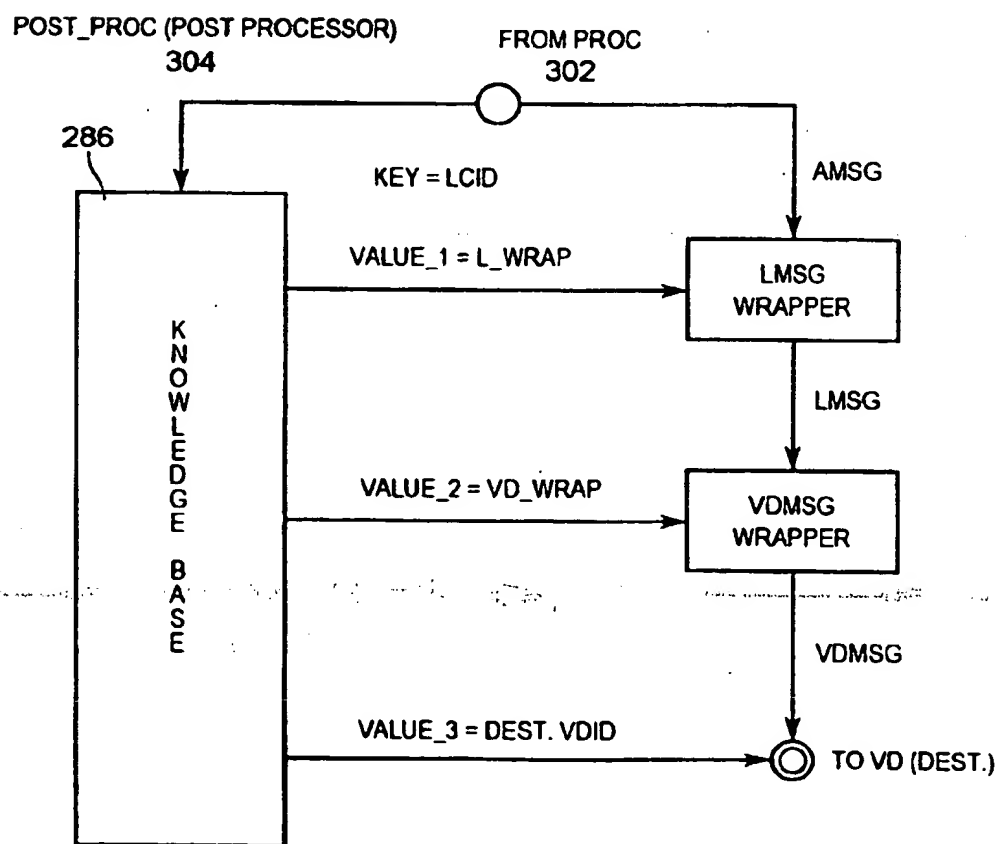



FIG. 11


12/15

FIG. 12FIG. 13


SUBSTITUTE SHEET (RULE 26)

13/15

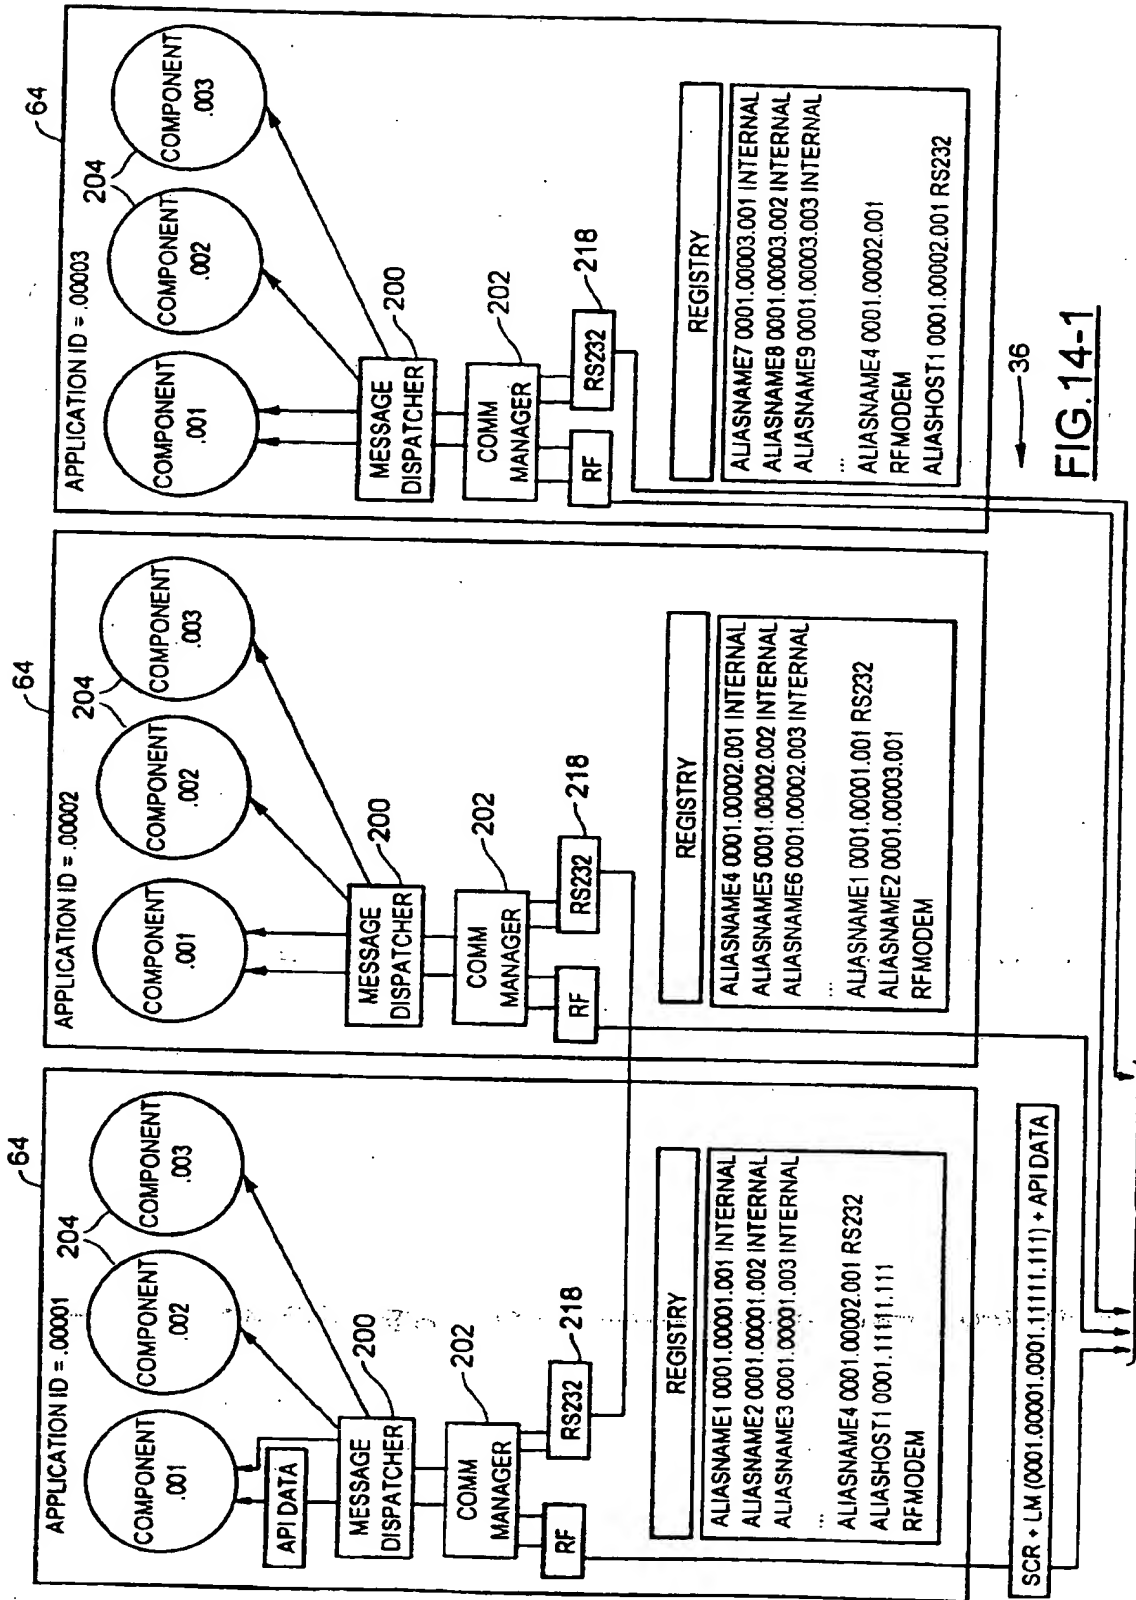

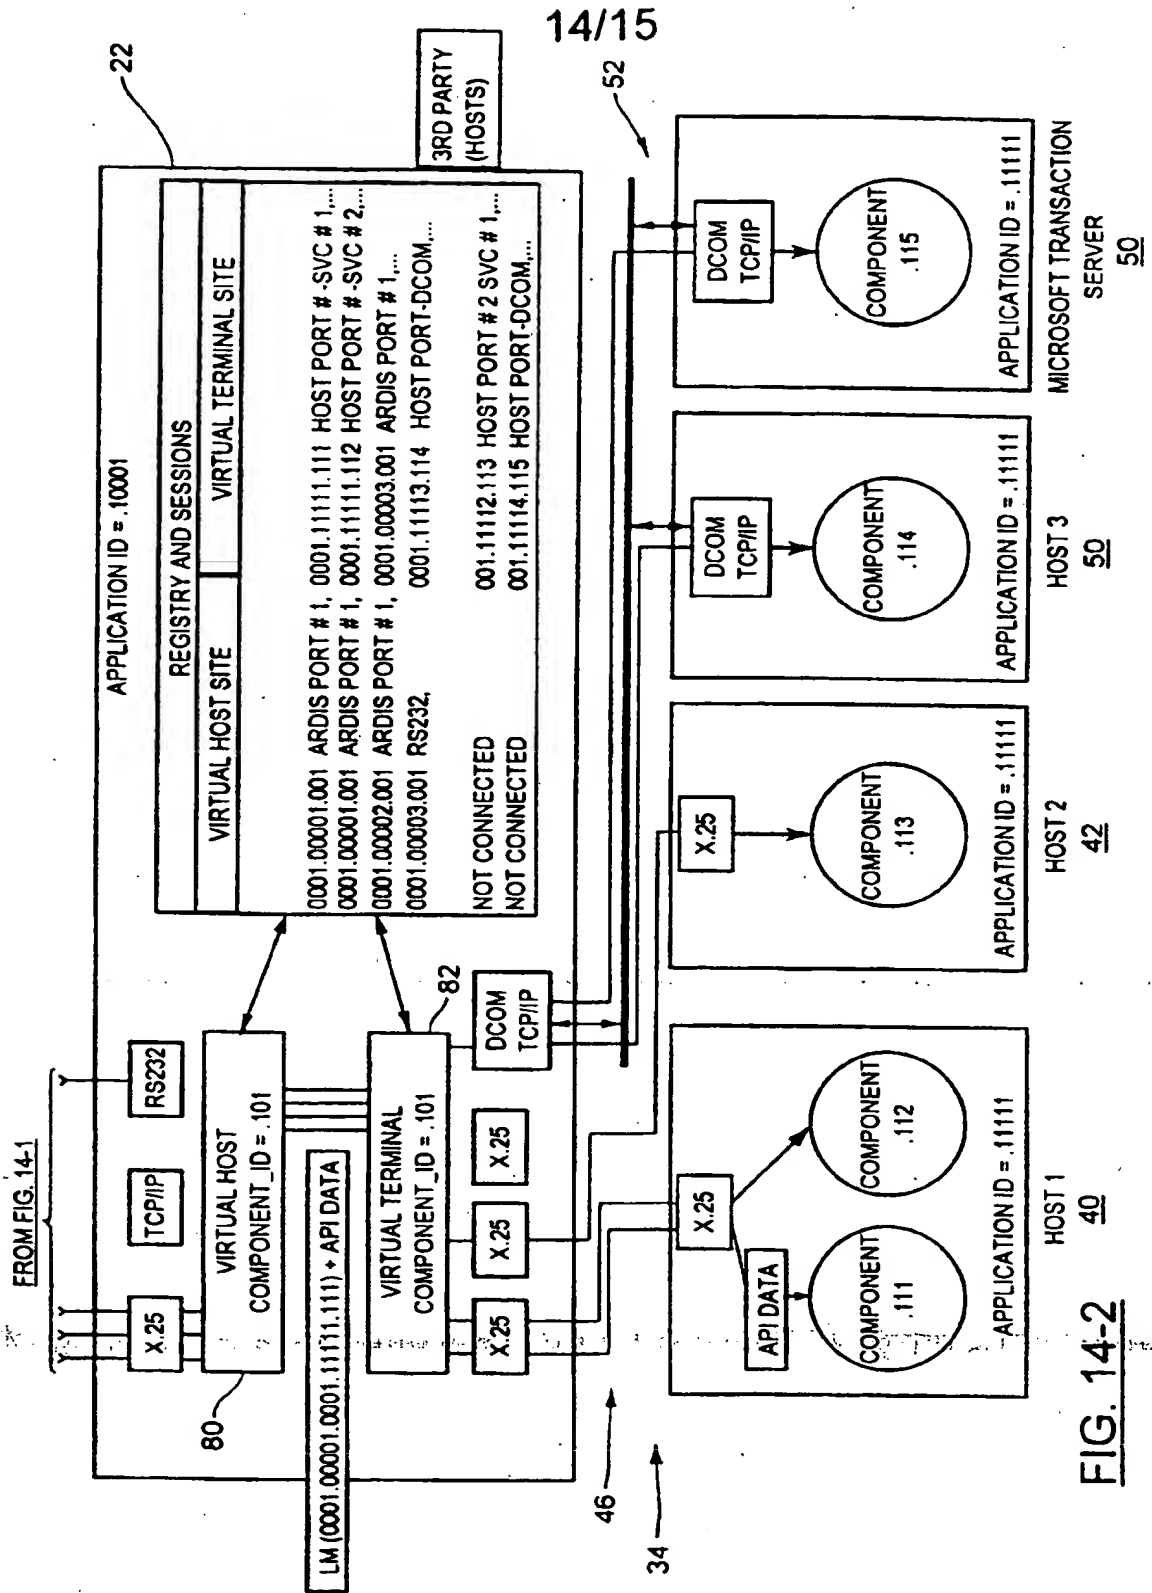

15/15

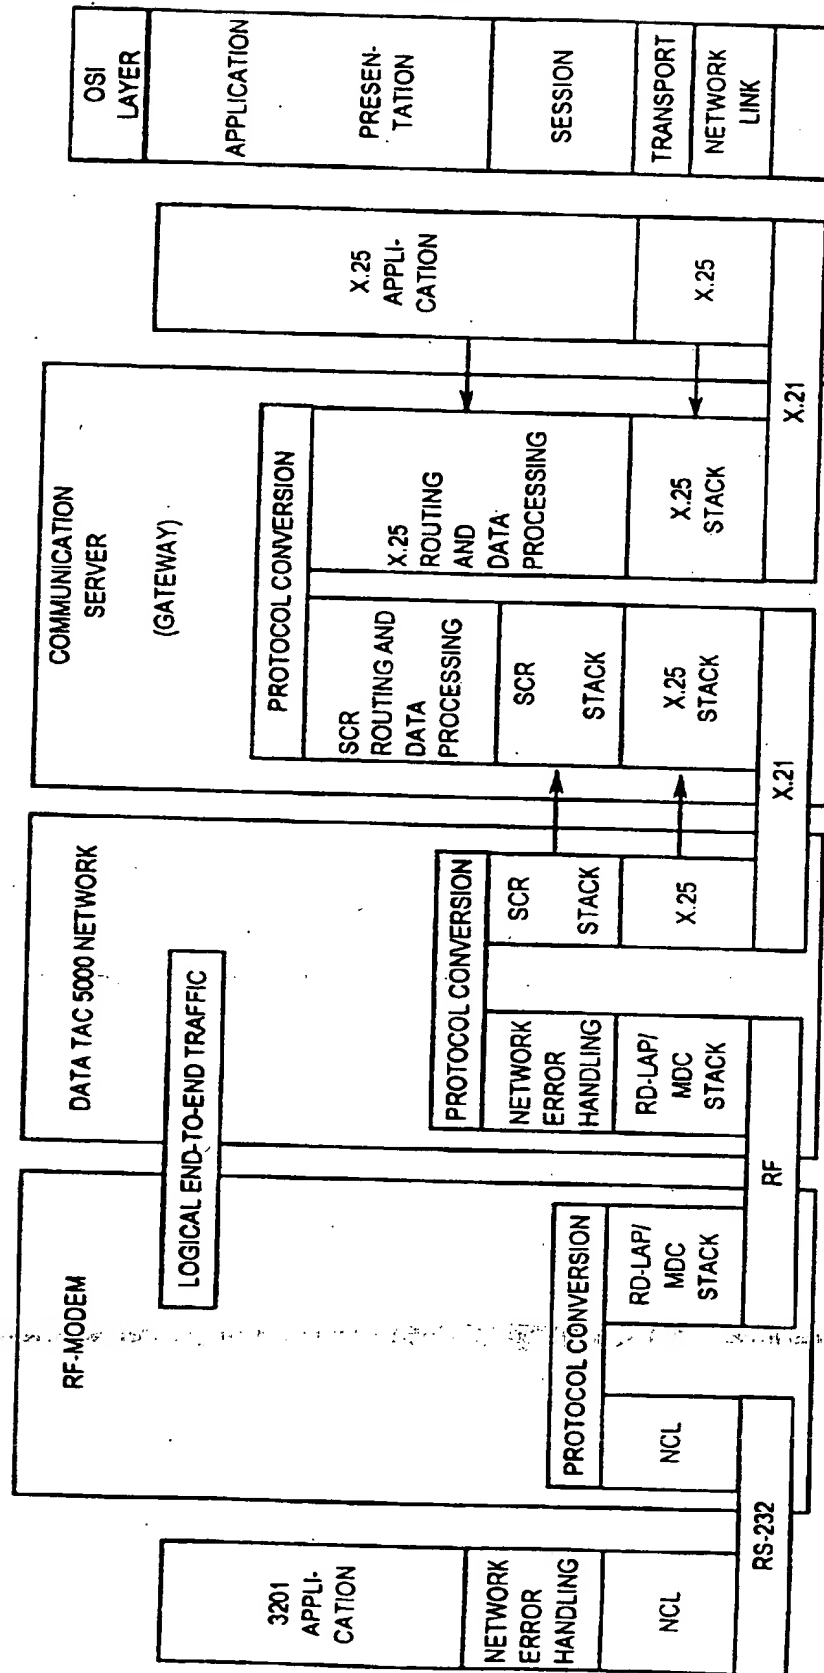

**FIG. 15**



# INTERNATIONAL SEARCH REPORT

International Application No

PCT/CA 98/01146

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 6 H04L12/28 H04L29/06

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04L H04Q H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 777 394 A (ALCATEL BELL NV) 4 June 1997  see column 1, line 39 - line 46 see column 2, line 53 - line 57 see column 3, line 33 - line 54 see column 4, line 55 - column 5, line 11 see column 6, line 1 - line 18 see column 7, line 26 - line 32 see column 9, line 6 - line 14	1-7, 10, 11, 14, 16-19
Y	---	8, 9, 12, 13, 15
	-/--	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

10 May 1999

Date of mailing of the international search report

18/05/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo m,  
Fax: (+31-70) 340-3016

Authorized officer

Brichau, G

2

## INTERNATIONAL SEARCH REPORT

Int. l. Application No  
PCT/CA 98/01146

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 97 01940 A (PHILIPS ELECTRONICS NV ;PHILIPS NORDEN AB (SE)) 16 January 1997 see page 1, line 15 - line 22 see page 2, line 6 - line 17 see page 4, line 8 - line 14 see page 4, line 25 - line 29 see page 5, line 2 - line 4 see page 5, line 21 - line 30 see page 6, line 23 - line 33 see page 8, line 1 - line 7	1-7,10, 11,14
Y		8,9,12, 13,15
X	EP 0 748 064 A (GLOBALSTAR LP) 11 December 1996 see column 6, line 41 - line 48; figures 2,7 see column 6, line 53 - column 7, line 5 see column 7, line 32 - line 40 see column 13, line 56 - column 14, line 11	1,2,10
Y	US 4 999 833 A (LEE WILLIAM C) 12 March 1991 see column 2, line 16 - line 31 see column 2, line 44 - column 3, line 29	12,13
Y	US 5 682 460 A (HYZIAK JANUSZ ET AL) 28 October 1997 see column 1, line 44 - line 57 see column 6, line 42 - line 62 see column 7, line 26 - line 28 see claims 1,6	8,9,15
A	WO 97 32439 A (DECKER PETER ;KAARTINEN KALEVI (DE); GUSTAFSSON PATRIK (FI); NOKIA) 4 September 1997 see page 1, line 5 - line 16 see page 2, line 11 - line 22 see page 3, line 20 - line 27 see page 4, line 3 - line 26	16-19

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/CA 98/01146

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0777394 A	04-06-1997	JP 10004432 A	06-01-1998
WO 9701940 A	16-01-1997	EP 0787413 A JP 10505725 T	06-08-1997 02-06-1998
EP 0748064 A	11-12-1996	US 5640386 A AU 5380096 A CA 2173291 A CN 1143869 A JP 8331031 A WO 9639758 A	17-06-1997 24-12-1996 07-12-1996 26-02-1997 13-12-1996 12-12-1996
US 4999833 A	12-03-1991	EP 0201308 A	12-11-1986
US 5682460 A	28-10-1997	AU 687583 B AU 2949995 A CA 2174762 A CN 1134755 A EP 0727069 A WO 9607141 A	26-02-1998 22-03-1996 07-03-1996 30-10-1996 21-08-1996 07-03-1996
WO 9732439 A	04-09-1997	FI 960895 A AU 1881497 A CA 2247449 A EP 0882375 A	27-08-1997 16-09-1997 04-09-1997 09-12-1998

Form PCT/ISA/210 (patent family annex) (July 1992)

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.